


0032-45XX

>

:2026-05-14

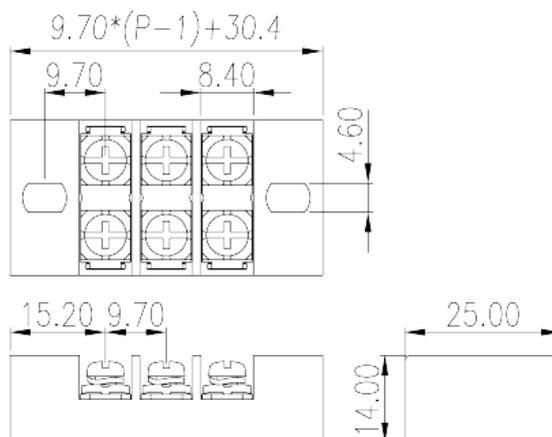

Pitch: 9.70mm, M3.5, 300V, 15A

	Panel Mounting, Screw Connection
	Panel Mounting
(mm)	9.7
	Black (default)
	Screw connection
	With mounting flange
(mm)	$9.70 * (P - 1) + 30.4$
(mm)	25
(mm)	14
()	08&12P
	Single Row
	16&24
	PBT
	IIIa
UL 94	V0
	1000M at DC 500V

		COPPER ALLOY
		Ni PLATED
-IEC		
(V)		320
(A)		24
(II/2)(V)		400
(III/2)(V)		320
(III/3)(V)		250
(II/2)(KV)		4
(III/2)(KV)		4
(III/3)(KV)		4
(mm ²)		0.34
(mm ²)		2.5
(mm ²)		0.34
(mm ²)		2.5
2	(mm ²)	0.34
2	(mm ²)	2.5
2	(mm ²)	0.34
2	(mm ²)	2.5
		M3.5
Width)(mm)	(Blade thickness x	1x5.5
Philips		PH2
	(N.m)	0.8
	(N.m)	1
		10~11
-UL		
(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		15
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	22
UL/CUL	AWG	12

UL/CUL	AWG	22
UL/CUL	AWG	12

&

(YES or NO)	YES
	120
	-40

