


0032-45XX

>

:2026-02-09

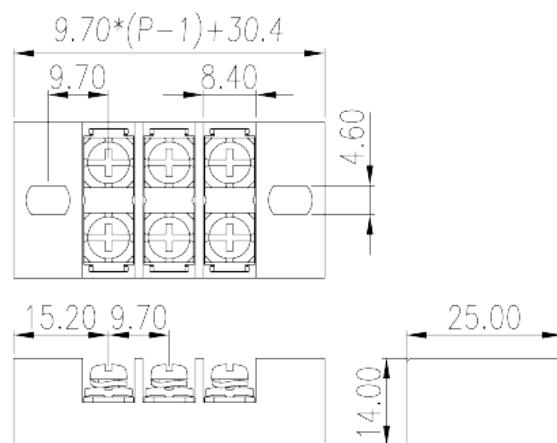

Pitch: 9.70mm, M3.5, 300V, 15A

| | |
|------|----------------------------------|
| | Panel Mounting, Screw Connection |
| (mm) | Panel Mounting |
| (mm) | 9.7 |
| (mm) | Black (default) |
| (mm) | Screw connection |
| (mm) | With mounting flange |
| (mm) | $9.70*(P-1)+30.4$ |
| (mm) | 25 |
| (mm) | 14 |
| () | 08&12P |
| | Single Row |
| | 16&24 |

| | |
|-------|---------------------------------------|
| UL 94 | PBT IIIa V0 1000M at DC 500V |
|-------|---------------------------------------|



Delight Through Connections

COPPER ALLOY

Ni PLATED

-IEC

| | | |
|--------------------|--------------------|-------|
| (V) | | 320 |
| (A) | | 24 |
| (II/2)(V) | | 400 |
| (III/2)(V) | | 320 |
| (III/3)(V) | | 250 |
| (II/2)(KV) | | 4 |
| (III/2)(KV) | | 4 |
| (III/3)(KV) | | 4 |
| (mm ²) | | 0.34 |
| (mm ²) | | 2.5 |
| (mm ²) | | 0.34 |
| (mm ²) | | 2.5 |
| 2 | (mm ²) | 0.34 |
| 2 | (mm ²) | 2.5 |
| 2 | (mm ²) | 0.34 |
| 2 | (mm ²) | 2.5 |
| | | M3.5 |
| Width)(mm) | (Blade thickness x | 1x5.5 |
| Philips | | PH2 |
| | (N.m) | 0.8 |
| | (N.m) | 1 |
| | | 10~11 |

-UL

| | | |
|---------------------|-----|-----|
| (UL/CUL Group B)(V) | | 300 |
| (UL/CUL Group B)(A) | | 15 |
| (UL/CUL Group D)(V) | | 300 |
| (UL/CUL Group D)(A) | | 10 |
| UL/CUL | AWG | 22 |
| UL/CUL | AWG | 12 |

| | | |
|--------|-----|----|
| UL/CUL | AWG | 22 |
| UL/CUL | AWG | 12 |

&

| | |
|-------------|-----|
| (YES or NO) | YES |
| | 120 |
| | -40 |

