


## 0032-45XX

> :2025-11-05





Pitch: 9.70mm, M3.5, 300V, 15A

	Panel Mounting, Screw Connection
	Panel Mounting
(mm)	9.7
	Black (default)
	Screw connection
	With mounting flange
(mm)	9.70*(P-1)+30.4
mm)	25
mm)	14
( )	08&12P
	Single Row
	16&24

	PBT
	IIIa
UL 94	VO
	1000M at DC 500V


		COPPER ALLOY
		Ni PLATED
-IEC		
(V)		320
(A)		24
(II/2)(V)		400
(III/2)(V)		320
(III/3)(V)		250
(II/2)(KV)		4
(III/2)(KV)		4
(III/3)(KV)		4
(mm²)		0.34
(mm²)		2.5
(mm ² )		0.34
(mm²)		2.5
2 (	mm <sup>2</sup> )	0.34
2 (	mm <sup>2</sup> )	2.5
2 (	mm <sup>2</sup> )	0.34
2 (	mm²)	2.5
		M3.5
(Blade th	ickness x	1x5.5
Philips		PH2
(N.m)		0.8
(N.m)		1
		10~11
-UL		
(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		15
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL AWG		22
UL/CUL AWG		12



UL/CUL	AWG	22
UL/CUL	AWG	12

&

(YES or NO)	YES
	120
	-40

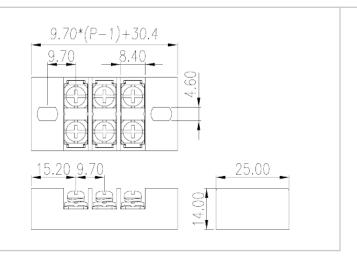

CE

