
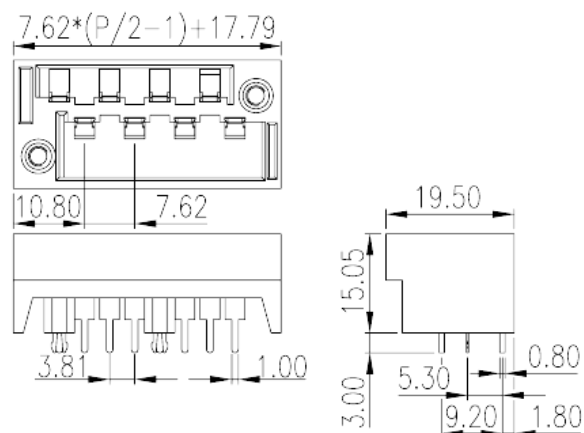


# 2DSDB-01-XX

>

:2026-07-04

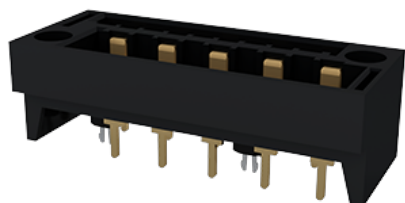

Pitch: 7.62mm, 300V, 12A

	Pluggable
	Pluggable
(mm)	7.62
	Grey (default)
	Without
	With threaded flange
	Wave Soldering
(mm)	$7.62 * (P/2 - 1) + 17.79$
(mm)	19.5
(mm)	15.05
(    x    ) (mm)	0.8x1
PCB      (mm)	1.7
(    )	06P~42P
	Bi-level
	6~42
	PBT



	IIIa
UL 94	V0
	1000M at DC 500V
	COPPER ALLOY
	Au PLATED

**-IEC**

(V)	250
(A)	10
(II/2)(V)	500
(III/2)(V)	250
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(N.m)	0.5

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	12
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10

**&**

(YES or NO)	YES
	120
	-40

--	--

