
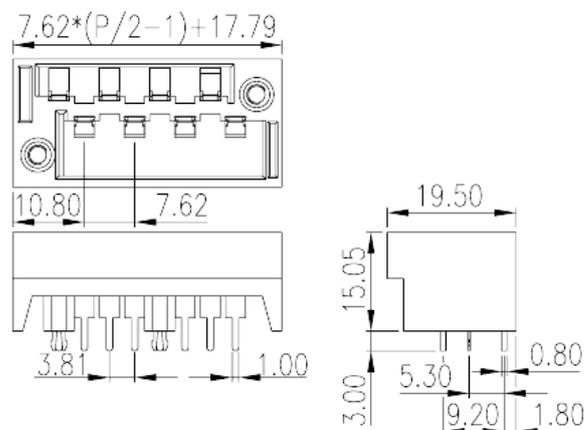


2DSDB-01-XX

>

:2026-05-14

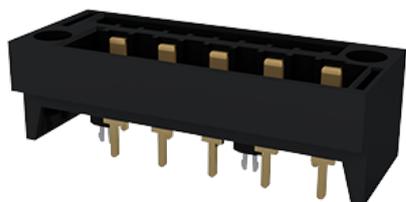

Pitch: 7.62mm, 300V, 12A

| | |
|------------------|----------------------------|
| | Pluggable |
| | Pluggable |
| (mm) | 7.62 |
| | Grey (default) |
| | Without |
| | With threaded flange |
| | Wave Soldering |
| (mm) | $7.62 * (P/2 - 1) + 17.79$ |
| (mm) | 19.5 |
| (mm) | 15.05 |
| (x) (mm) | 0.8x1 |
| PCB (mm) | 1.7 |
| () | 06P~42P |
| | Bi-level |
| | 6~42 |
| | PBT |



| | |
|-------|------------------|
| | IIIa |
| UL 94 | V0 |
| | 1000M at DC 500V |
| | COPPER ALLOY |
| | Au PLATED |

-IEC

| | |
|-------------|-----|
| (V) | 250 |
| (A) | 10 |
| (II/2)(V) | 500 |
| (III/2)(V) | 250 |
| (III/3)(V) | 250 |
| (II/2)(KV) | 4 |
| (III/2)(KV) | 4 |
| (III/3)(KV) | 4 |
| (N.m) | 0.5 |

-UL

| | |
|---------------------|-----|
| (UL/CUL Group B)(V) | 300 |
| (UL/CUL Group B)(A) | 12 |
| (UL/CUL Group D)(V) | 300 |
| (UL/CUL Group D)(A) | 10 |

&

| | |
|-------------|-----|
| (YES or NO) | YES |
| | 120 |
| | -40 |

| | |
|--|--|
| | |
|--|--|

