


0184-35XX

PCB > PCB -

:2026-04-02

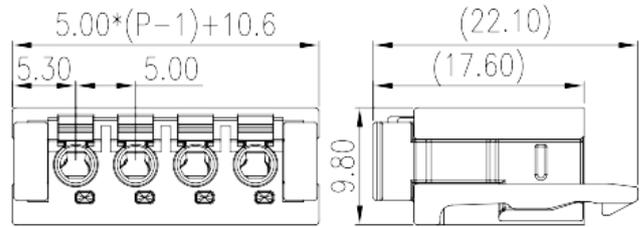

Pitch: 5.00mm, 300V, 6A

	PCB Connector-Plug, Push-in Design
	PCB Connector-Plug
(mm)	5.00
	Refer to drawing
	Push-in design
	With lock flange
(mm)	$5.00 * (P - 1) + 10.6$
(mm)	9.8
(mm)	22.1
()	02P~18P
	Single level
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

Tin PLATED

-IEC

(V)	320
(A)	7
(II/2)(V)	320
(III/2)(V)	320
(III/3)(V)	200
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.2
(mm ²)	1.5
(mm ²)	0.2
(mm ²)	1.5
(mm ²) , ,	0.25
(mm ²) , ,	1
(mm ²) , ,	0.25
(mm ²) , ,	0.75
Philips	0.4x2.5
	8~9

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	6
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	6
UL/CUL AWG	24
UL/CUL AWG	16
UL/CUL AWG	24
UL/CUL AWG	16

&

가 (YES or NO)	YES
	120
	-40

