
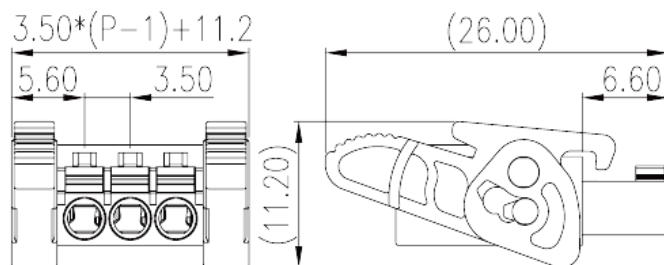


# 0221-29XX

PCB > PCB -

:2026-07-06

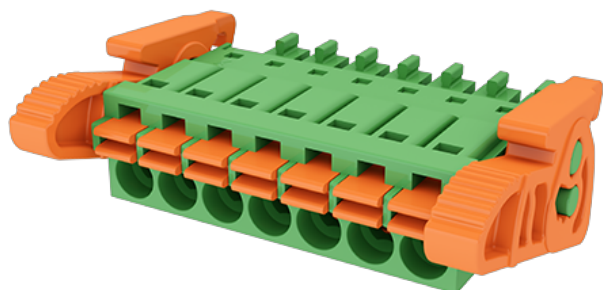

Pitch : 3.50mm, 300V, 8A

	PCB Connector, Push-in Design
	PCB Connector – Plug
(mm)	3.50
	Refer to drawing
	Push-in Design
	With release tool
(mm)	$3.50 * (P - 1) + 11.2$
(mm)	11.2
(mm)	26
( )	02P~20P
	Single level

	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

: +886-2-8069-9000 / : service@dinkle.com

Tin PLATED

**-IEC**

(V)	320
(A)	8
(II/2)(V)	320
(III/2)(V)	160
(III/3)(V)	160
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	1
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	0.75
Philips	0.4x2.5
	8~10

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	8
UL/CUL AWG	24
UL/CUL AWG	16
UL/CUL AWG	24
UL/CUL AWG	16

**&**

가 (YES or NO)	YES
	120

-40

UL

(Group B) (AWG)	24~16
(Group B) (V)	300
(Group B) (A)	8

CUL

(Group B) (AWG)	24~16
(Group B) (V)	300
(Group B) (A)	8

