


DKBB10-XXPK

NEMA

>

:2026-02-09

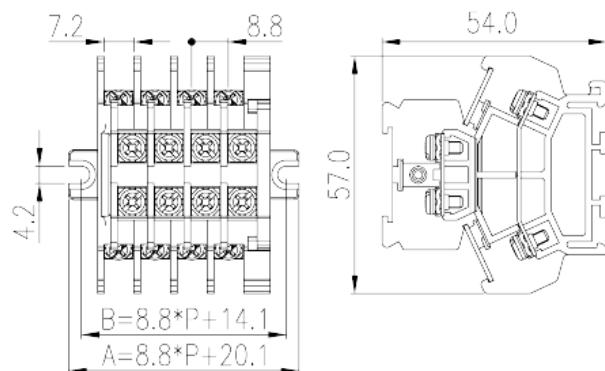

Pitch : 8.80mm, M3, 600V, 15A

	Barrier terminals blocks, Panel Mounting
(mm)	Panel Mounting
	8.80
(mm)	Black (default)
	Screw connection
(mm)	Panel Mounting
	8.80*P+20.1
(mm)	57
(mm)	54
()	02P~12P
	Double level
	4~24

UL 94	PC IIIa V2
	1000M at DC 500V



Delight Through Connections

Copper Alloy

Ni plated

-IEC

(V)		800
(A)		24
(III/3)(V)		800
(III/3)(KV)		8
(mm ²)		0.34
(mm ²)		2.5
(mm ²)		0.34
(mm ²)		2.5
2	(mm ²)	2.5
2	(mm ²)	2.5
		M3
Width)(mm)	(Blade thickness x	0.8x4.0
Philips		PH2
(N.m)		0.5
(N.m)		0.5
(N.m)		0.6
		7~8
		TS-35N、 TS-35/15N
		YES
		NO

-UL

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		15
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		15
UL/CUL	AWG	22
UL/CUL	AWG	14
UL/CUL	AWG	22
UL/CUL	AWG	14

&



(YES or NO)	YES
가 (YES or NO)	NO
	125
	-40

UL

(Group B)(AWG)	22~14
(Group B)(V)	600
(Group B)(A)	15
(Group C)(AWG)	22~14
(Group C)(V)	600
(Group C)(A)	15

CUL

(Group B)(AWG)	22~14
(Group B)(V)	600
(Group B)(A)	15
(Group C)(AWG)	22~14
(Group C)(V)	600
(Group C)(A)	15

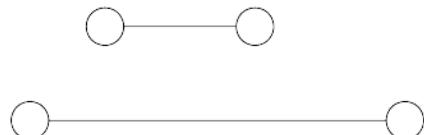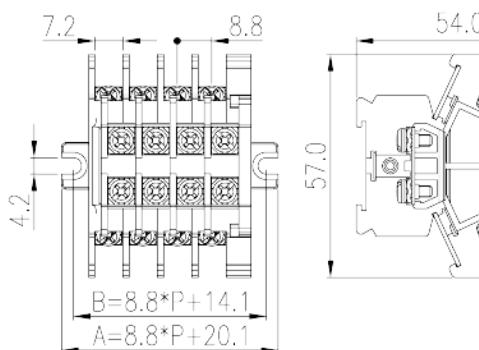



Delight Through Connections

