
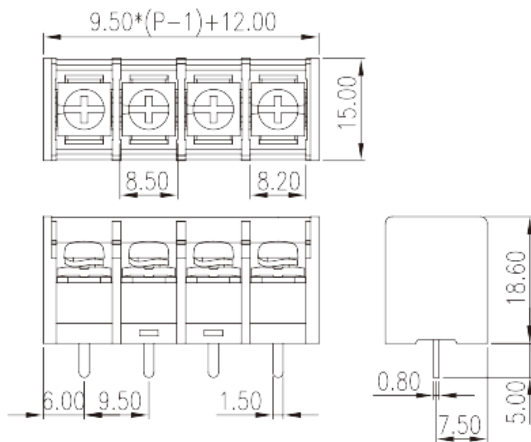


# DT-4C-B01W-XX

>

:2026-07-05 :1.1

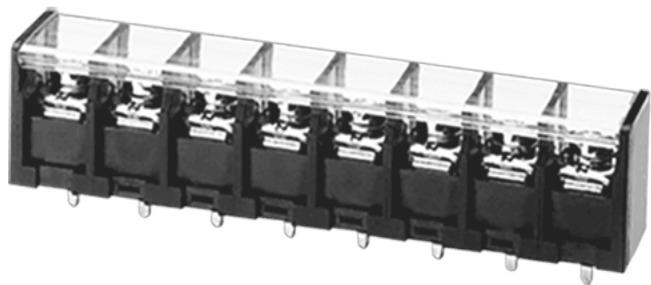

Pitch: 9.50mm , M3.5, 300V, 20A

	Barrier terminal blocks , Screw connection
	Single Row
(mm)	9.50
	Black(default)
	Screw connection
	Without
( x ) (mm)	0.8X1.5
PCB (mm)	2.1
	Single Row
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Tinned

-IEC

(V)		500
(A)		24
(II/2)(V)		630
(III/2)(V)		500
(III/3)(V)		400
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm <sup>2</sup> )		0.2
(mm <sup>2</sup> )		2.5
(mm <sup>2</sup> )		0.2
(mm <sup>2</sup> )		2.5
2	(mm <sup>2</sup> )	1.5
2	(mm <sup>2</sup> )	1.5
		M3.5
Width)(mm)	(Blade thickness x	0.8x4.
Philips		PH2
	(N.m)	0.8
	(N.m)	1
		8~9

### -UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		20
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	22
UL/CUL	AWG	12
UL/CUL	AWG	22
UL/CUL	AWG	12

### &

(YES or NO)		YES
		130

-40

**UL**

(Group B) (AWG)	22~12
(Group B) (V)	300
(Group B) (A)	20
(Group D) (AWG)	22~12
(Group D) (V)	300
(Group D) (A)	10

**CUL**

(Group B) (AWG)	22~12
(Group B) (V)	300
(Group B) (A)	20
(Group D) (AWG)	22~12
(Group D) (V)	300
(Group D) (A)	10

**VDE**

(mm <sup>2</sup> )	0.2~2.5
(V)	500
(A)	24

