


# 0222-10XX

>

:2026-05-14 :1.2

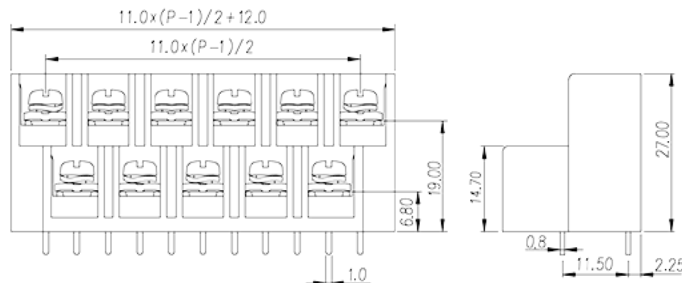

Pitch : 11.00 mm , M3.5 , 600V, 20A

	Barrier terminal blocks , Screw connection
	Bi-level terminal blocks
(mm)	11.00
	Black(default)
	Screw connection
	Without
(    x    ) (mm)	0.8x1.0
PCB        (mm)	1.6
	Bi-level
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Tinned

-IEC

(A)		24
(II/2)(V)		1000
(III/2)(V)		630
(III/3)(V)		630
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm <sup>2</sup> )		0.5
(mm <sup>2</sup> )		2.5
(mm <sup>2</sup> )		0.5
(mm <sup>2</sup> )		2.5
2	(mm <sup>2</sup> )	1.5
2	(mm <sup>2</sup> )	1.5
		M3.5
Width)(mm)	(Blade thickness x	0.8x4.0
Philips		PH2
(N.m)		1
(N.m)		0.8
(N.m)		1
		8~9

### -UL

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		20
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		20
(UL/CUL Group D)(V)		600
(UL/CUL Group D)(A)		5
UL/CUL	AWG	20
UL/CUL	AWG	12
UL/CUL	AWG	20
UL/CUL	AWG	12

&



(YES or NO)	YES
	130
	-40

## UL

(Group B)(AWG)	20~12
(Group B)(V)	600
(Group B)(A)	20
(Group C)(AWG)	20~12
(Group C)(V)	600
(Group C)(A)	20
(Group D)(AWG)	20~12
(Group D)(V)	600
(Group D)(A)	5

## VDE

(mm <sup>2</sup> )	0.5~2.5
(A)	24

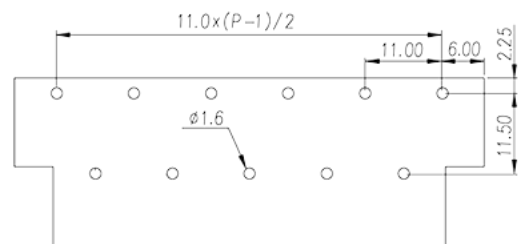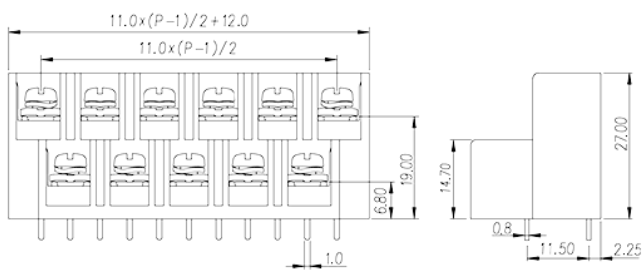



Delight Through Connections