
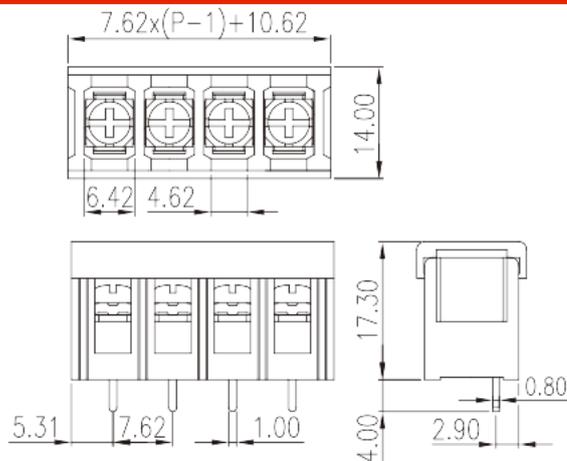


# DT-2C-B07W-XX

>

:2026-05-14 :1.1

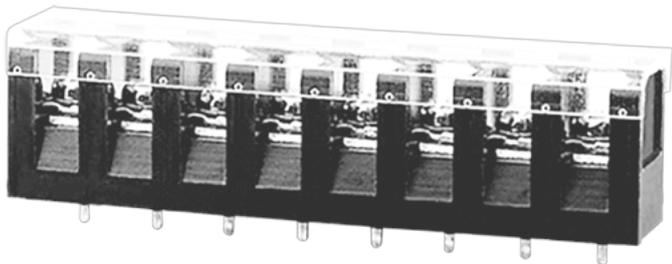

Pitch: 7.62mm , M3, 300V, 15A

	Barrier terminal blocks , Screw connection
	Single Row
(mm)	7.62
	Black(default)
	Screw connection
	Without
( x ) (mm)	1.0X0.8
PCB (mm)	1.6~1.7
	Single Row
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Tinned

-IEC

(A)		17.5
(II/2)(V)		630
(III/2)(V)		630
(III/3)(V)		400
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm <sup>2</sup> )		0.2
(mm <sup>2</sup> )		1.5
(mm <sup>2</sup> )		0.2
(mm <sup>2</sup> )		1.5
2	(mm <sup>2</sup> )	1
2	(mm <sup>2</sup> )	1
		M3
Width)(mm)	(Blade thickness x	0.8x4.0
Philips		PH2
	(N.m)	0.8
	(N.m)	0.5
	(N.m)	0.8
		7~8

### -UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		15
UL/CUL	AWG	22
UL/CUL	AWG	14
UL/CUL	AWG	22
UL/CUL	AWG	14

### &




(YES or NO)		YES
		130
		-40

### UL

(Group B) (AWG)	22~14
(Group B) (V)	300
(Group B) (A)	15

**CUL**

(Group B) (AWG)	22~14
(Group B) (V)	300
(Group B) (A)	15

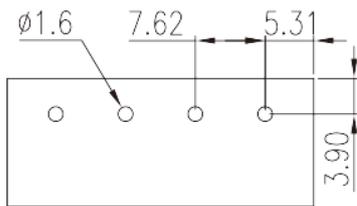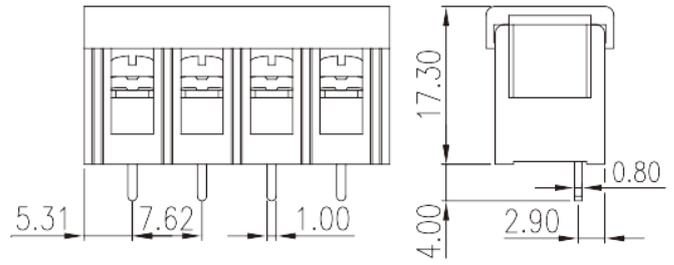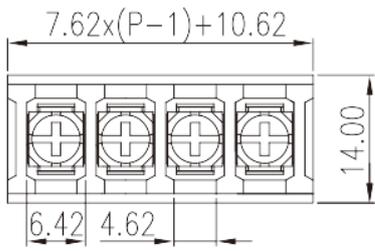



Delight Through Connections