



## DT-15-B01W-XX

> :2025-11-05 :1.1

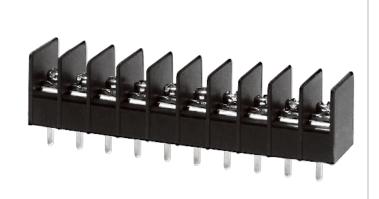



Pitch: 6.35mm, #3-48, 300V, 10A

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	6.35
	Black (default)
	Screw connection
	Without
	Wave Soldering
(mm)	6.35*(P-1)+7.65
(mm)	14
(mm)	15
( x ) (mm)	0.8x1.2
PCB (mm)	1.6
( )	10P
	Single Row

PA66
I

UL 94	VO
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED
-IEC	
(V)	320
(A)	17.5
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	320
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ² )	0.34
(mm ² )	1.5
(mm ² )	0.34
(mm ² )	1.5
2 (mm	2) 1
2 (mm	2) 1
	#3-48
(Blade thickn Width) (mm)	ess x 0.6x0.35
Philips	PH1
(N.m)	0.4
(N.m)	0.4
(N.m)	0.45
	6~7
-UL	
(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	10
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	22



UL/CUL	AWG	14
UL/CUL	AWG	22
UL/CUL	AWG	14
&		
(YES or NO)		YES
		120
		-40
UL		
(Group B)(AWG)		22~14
(Group B)(V)		300
(Group B)(A)		10
(Group D)(AWG)		22~14
(Group D)(V)		300
(Group D)(A)		10
CUL		
(Group B)(AWG)		22~14
(Group B)(V)		300
(Group B)(A)		10
(Group D)(AWG)		22~14
(Group D)(V)		300
(Group D)(A)		10

