
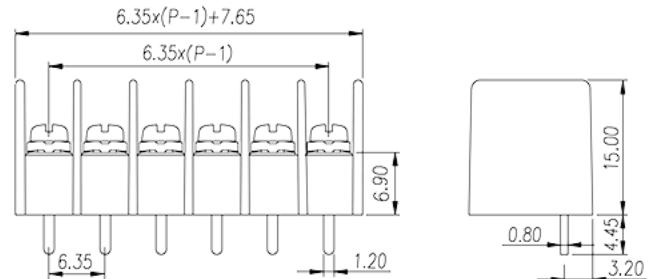


## DT-15-B01W-XX

&gt;

:2026-02-09

:1.1

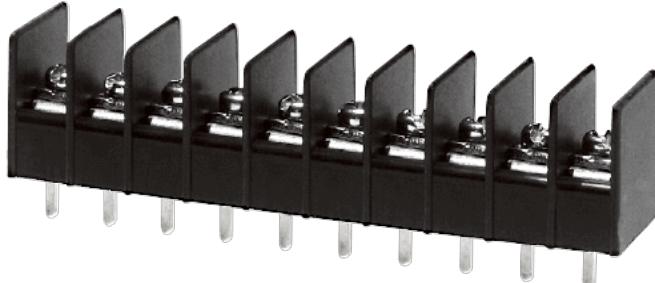

Pitch: 6.35mm, #3-48, 300V, 10A

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	6.35
	Black (default)
	Screw connection
	Without
	Wave Soldering
(mm)	6.35*(P-1)+7.65
(mm)	14
(mm)	15
(   x   ) (mm)	0.8x1.2
PCB (mm)	1.6
(   )	10P
	Single Row

	PA66
	I

UL 94

V0

500M at DC 500V

COPPER ALLOY

Tin PLATED

## -IEC

(V)		320
(A)		17.5
(II/2)(V)		630
(III/2)(V)		320
(III/3)(V)		320
(II/2)(KV)		4
(III/2)(KV)		4
(III/3)(KV)		4
(mm <sup>2</sup> )		0.34
(mm <sup>2</sup> )		1.5
(mm <sup>2</sup> )		0.34
(mm <sup>2</sup> )		1.5
2 (mm <sup>2</sup> )		1
2 (mm <sup>2</sup> )		1
		#3-48
Width)(mm)	(Blade thickness x	0.6x0.35
Philips		PH1
(N.m)		0.4
(N.m)		0.4
(N.m)		0.45
		6~7

## -UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		10
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	22

UL/CUL	AWG	14
UL/CUL	AWG	22
UL/CUL	AWG	14

&

(YES or NO)	YES
	120
	-40

## UL

(Group B)(AWG)	22~14
(Group B)(V)	300
(Group B)(A)	10
(Group D)(AWG)	22~14
(Group D)(V)	300
(Group D)(A)	10

## CUL

(Group B)(AWG)	22~14
(Group B)(V)	300
(Group B)(A)	10
(Group D)(AWG)	22~14
(Group D)(V)	300
(Group D)(A)	10

