
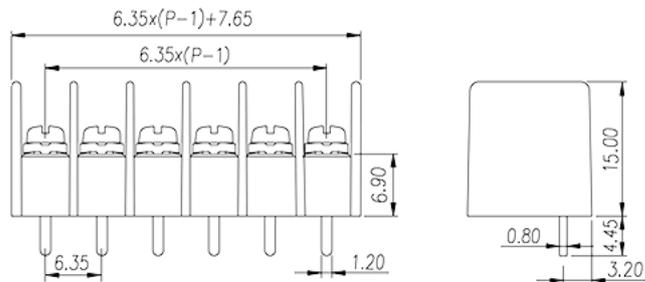


DT-15-B01W-XX

>

:2026-03-31 :1.1

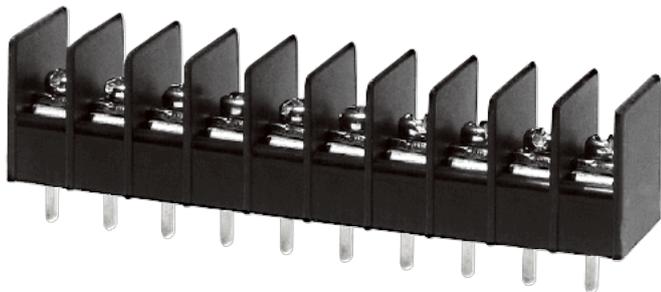

Pitch: 6.35mm, #3-48, 300V, 10A

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	6.35
	Black (default)
	Screw connection
	Without
	Wave Soldering
(mm)	$6.35 * (P - 1) + 7.65$
(mm)	14
(mm)	15
(x) (mm)	0.8x1.2
PCB (mm)	1.6
()	10P
	Single Row
	PA66
	I



UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	320
(A)	17.5
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	320
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.34
(mm ²)	1.5
(mm ²)	0.34
(mm ²)	1.5
2 (mm ²)	1
2 (mm ²)	1
	#3-48
Width)(mm) (Blade thickness x	0.6x0.35
Philips	PH1
(N.m)	0.4
(N.m)	0.4
(N.m)	0.45
	6~7

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	10
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	22



UL/CUL	AWG	14
UL/CUL	AWG	22
UL/CUL	AWG	14

&

(YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	22~14
(Group B)(V)	300
(Group B)(A)	10
(Group D)(AWG)	22~14
(Group D)(V)	300
(Group D)(A)	10

CUL

(Group B)(AWG)	22~14
(Group B)(V)	300
(Group B)(A)	10
(Group D)(AWG)	22~14
(Group D)(V)	300
(Group D)(A)	10

--	--

