


DT-25-B07W-XX

>

:2026-07-04 :1.1

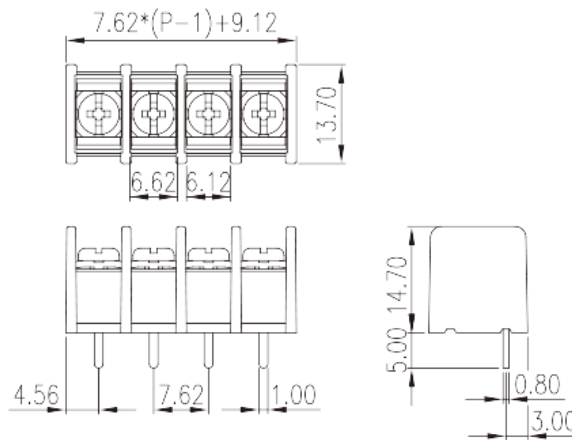

Pitch: 7.62mm, M3, 300V, 15A

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	7.62
	Black (default)
	Screw connection
	Without
(x) (mm)	0.8X1.0
PCB (mm)	1.8~2.0
	Single Row
	PA
	I
UL 94	V0
	Copper Alloy
	Tinned

-IEC



(A)		17.5
(II/2)(V)		630
(III/2)(V)		320
(III/3)(V)		320
(II/2)(KV)		4
(III/2)(KV)		4
(III/3)(KV)		4
(mm ²)		0.34
(mm ²)		1.5
(mm ²)		0.34
(mm ²)		1.5
2	(mm ²)	1
2	(mm ²)	1
		M3
Width)(mm)	(Blade thickness x	0.8x4.0
Philips		PH2
(N.m)		1.4
(N.m)		0.5
(N.m)		1.4
		6~7

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		15
(UL/CUL Group C)(V)		150
(UL/CUL Group C)(A)		15
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	22
UL/CUL	AWG	14
UL/CUL	AWG	22
UL/CUL	AWG	14

&



(YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	22~14
(Group B)(V)	300
(Group B)(A)	15
(Group C)(AWG)	22~14
(Group C)(V)	150
(Group C)(A)	15
(Group D)(AWG)	22~14
(Group D)(V)	300
(Group D)(A)	10

CUL

(Group B)(AWG)	22~14
(Group B)(V)	300
(Group B)(A)	15
(Group C)(AWG)	22~14
(Group C)(V)	150
(Group C)(A)	15
(Group D)(AWG)	22~14
(Group D)(V)	300
(Group D)(A)	10

--	--

