
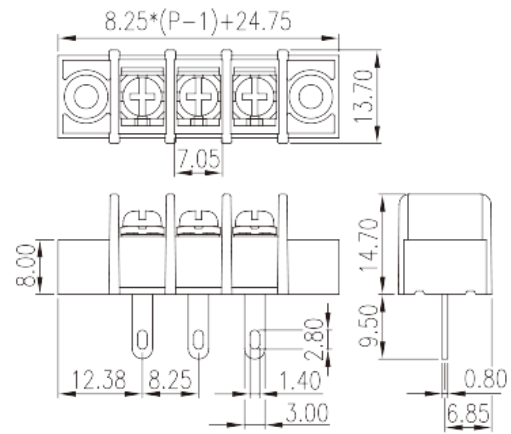


DT-35-A02W-XX

>

:2026-05-14

:1.1

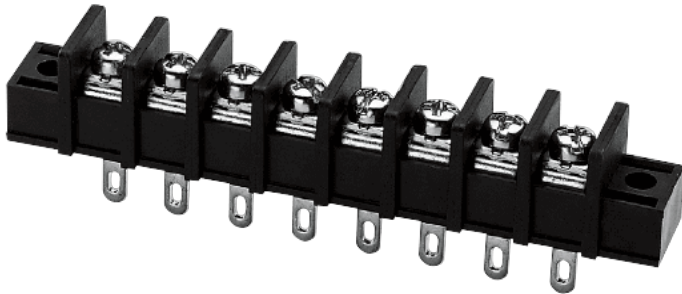

Pitch: 8.25mm, M3, 300V, 20A

| | |
|------------------|---|
| | Barrier terminal blocks, Screw connection |
| | Single Row |
| (mm) | 8.25 |
| | Black (default) |
| | Screw connection |
| | With mounting flange |
| (mm) | $8.25 \cdot (P-1) + 24.75$ |
| (mm) | 13.7 |
| (mm) | 14.7 |
| (x) (mm) | 0.8x3.0 |
| () | 02P~30P |
| | Single Row |
| | PA66 |
| | I |
| UL 94 | V0 |
| | 500M at DC 500V |



| | | |
|---------------------|--------------------|--------------|
| | | Copper Alloy |
| | | Tin PLATED |
| -IEC | | |
| (V) | | 630 |
| (A) | | 24 |
| (II/2)(V) | | 630 |
| (III/2)(V) | | 630 |
| (III/3)(V) | | 320 |
| (II/2)(KV) | | 6 |
| (III/2)(KV) | | 6 |
| (III/3)(KV) | | 6 |
| (mm ²) | | 0.2 |
| (mm ²) | | 2.5 |
| (mm ²) | | 0.2 |
| (mm ²) | | 2.5 |
| 2 | (mm ²) | 1.5 |
| 2 | (mm ²) | 1.5 |
| | | M3 |
| Width)(mm) | (Blade thickness x | 0.8x4.0 |
| Philips | | PH2 |
| (N.m) | | 1.4 |
| (N.m) | | 0.5 |
| (N.m) | | 1.4 |
| | | 7~8 |
| -UL | | |
| (UL/CUL Group B)(V) | | 300 |
| (UL/CUL Group B)(A) | | 20 |
| (UL/CUL Group C)(V) | | 150 |
| (UL/CUL Group C)(A) | | 20 |
| (UL/CUL Group D)(V) | | 300 |
| (UL/CUL Group D)(A) | | 10 |
| UL/CUL | AWG | 22 |



| | | |
|--------|-----|----|
| UL/CUL | AWG | 12 |
| UL/CUL | AWG | 22 |
| UL/CUL | AWG | 12 |

&

| | |
|-------------|-----|
| (YES or NO) | YES |
| | 120 |
| | -40 |

UL

| | |
|-----------------|-------|
| (Group B) (AWG) | 22~12 |
| (Group B) (V) | 300 |
| (Group B) (A) | 20 |
| (Group C) (AWG) | 22~12 |
| (Group C) (V) | 150 |
| (Group C) (A) | 20 |
| (Group D) (AWG) | 22~12 |
| (Group D) (V) | 300 |
| (Group D) (A) | 10 |

CUL

| | |
|-----------------|-------|
| (Group B) (AWG) | 22~12 |
| (Group B) (V) | 300 |
| (Group B) (A) | 20 |
| (Group C) (AWG) | 22~12 |
| (Group C) (V) | 150 |
| (Group C) (A) | 20 |
| (Group D) (AWG) | 22~12 |
| (Group D) (V) | 300 |
| (Group D) (A) | 10 |

CSA

| | |
|-------|-------|
| (AWG) | 22~16 |
| (V) | 300 |
| (A) | 15 |

