
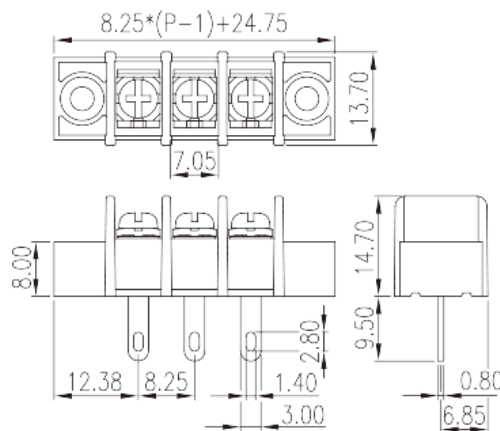


# DT-35-A02W-XX

>

:2026-07-04

:1.1

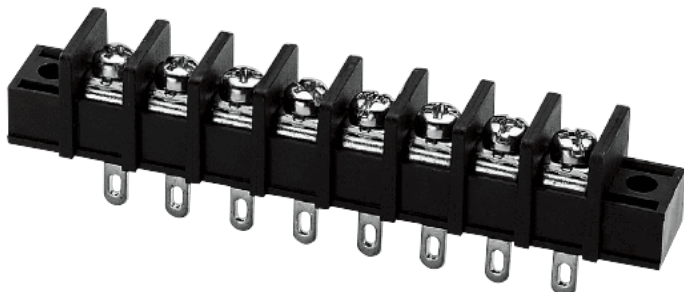

Pitch: 8.25mm, M3, 300V, 20A

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	8.25
	Black (default)
	Screw connection
	With mounting flange
(mm)	$8.25 \times (P-1) + 24.75$
(mm)	13.7
(mm)	14.7
(    x    ) (mm)	0.8x3.0
(    )	02P~30P
	Single Row
	PA66
	I
UL 94	V0
	500M at DC 500V



		Copper Alloy
		Tin PLATED
<b>-IEC</b>		
(V)		630
(A)		24
(II/2)(V)		630
(III/2)(V)		630
(III/3)(V)		320
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm <sup>2</sup> )		0.2
(mm <sup>2</sup> )		2.5
(mm <sup>2</sup> )		0.2
(mm <sup>2</sup> )		2.5
2	(mm <sup>2</sup> )	1.5
2	(mm <sup>2</sup> )	1.5
		M3
Width)(mm)	(Blade thickness x	0.8x4.0
Philips		PH2
(N.m)		1.4
(N.m)		0.5
(N.m)		1.4
		7~8
<b>-UL</b>		
(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		20
(UL/CUL Group C)(V)		150
(UL/CUL Group C)(A)		20
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	22



UL/CUL	AWG	12
UL/CUL	AWG	22
UL/CUL	AWG	12

&amp;

(YES or NO)	YES
	120
	-40

**UL**

(Group B)(AWG)	22~12
(Group B)(V)	300
(Group B)(A)	20
(Group C)(AWG)	22~12
(Group C)(V)	150
(Group C)(A)	20
(Group D)(AWG)	22~12
(Group D)(V)	300
(Group D)(A)	10

**CUL**

(Group B)(AWG)	22~12
(Group B)(V)	300
(Group B)(A)	20
(Group C)(AWG)	22~12
(Group C)(V)	150
(Group C)(A)	20
(Group D)(AWG)	22~12
(Group D)(V)	300
(Group D)(A)	10

**CSA**

(AWG)	22~16
(V)	300
(A)	15

