


DT-29-B01W-XX

>

:2026-07-04 :1.1

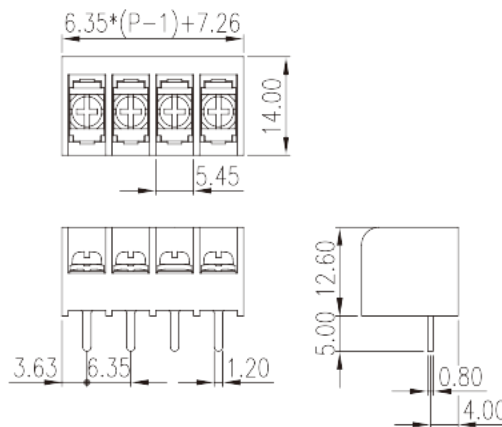

Pitch: 6.35mm, M2.6, 300V, 15A

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	6.35
	Black (default)
	Screw connection
	Without
	Wave Soldering
(mm)	$6.35 \times (P-1) + 7.26$
(mm)	14.00
(mm)	12.60
(x) (mm)	0.8x1.2
PCB (mm)	1.6
()	02P~30P
	Single Row
	PA66
	I

UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	320
(A)	17.5
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	200
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.34
(mm ²)	1.5
(mm ²)	0.34
(mm ²)	1.5
2 (mm ²)	1
2 (mm ²)	1
	M2.6
Width)(mm) (Blade thickness x	0.6x0.35
Philips	PH1
(N.m)	0.5
(N.m)	0.4
(N.m)	0.5
	6~7

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	22



UL/CUL	AWG	16
UL/CUL	AWG	22
UL/CUL	AWG	16

&

(YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	22~16
(Group B)(V)	300
(Group B)(A)	15
(Group D)(AWG)	22~16
(Group D)(V)	300
(Group D)(A)	10

CUL

(Group B)(AWG)	22~16
(Group B)(V)	300
(Group B)(A)	15
(Group D)(AWG)	22~16
(Group D)(V)	300
(Group D)(A)	10

CSA

(AWG)	22~16
(V)	300
(A)	10

--	--

