


# DT-35-B25W-XX

>

:2026-05-14 :1.1

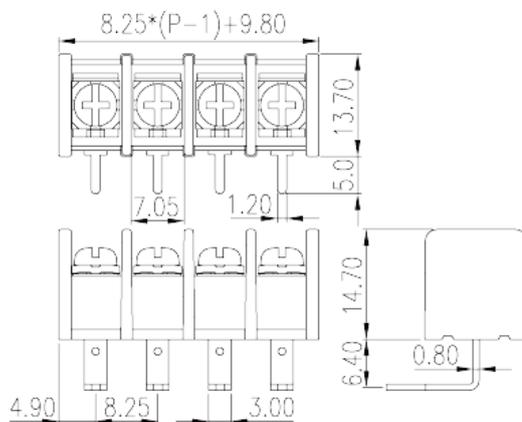

Pitch: 8.25mm, M3, 300V, 20A

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	8.25
	Black (default)
	Screw connection
	Without
	Wave Soldering
(mm)	$8.25 \times (P-1) + 9.8$
(mm)	13.7
(mm)	14.7
(    x    ) (mm)	0.8x1.2
PCB      (mm)	1.8~1.9
(    )	02P~33P
	Single Row
	PA66
	I

UL 94	V0
	500M at DC 500V
	Copper Alloy
	Tin PLATED

### -IEC

(V)	630
(A)	24
(II/2)(V)	630
(III/2)(V)	630
(III/3)(V)	320
(II/2)(KV)	6
(III/2)(KV)	6
(III/3)(KV)	6
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
2 (mm <sup>2</sup> )	1.5
2 (mm <sup>2</sup> )	1.5
	M3
Width)(mm) (Blade thickness x	0.8x4.0
Philips	PH2
(N.m)	0.5
(N.m)	0.8
	7~8

### -UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	20
(UL/CUL Group C)(V)	150
(UL/CUL Group C)(A)	20
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10



UL/CUL	AWG	22
UL/CUL	AWG	12
UL/CUL	AWG	22
UL/CUL	AWG	12

&amp;

(YES or NO)	YES
	120
	-40

**UL**

(Group B)(AWG)	22~12
(Group B)(V)	300
(Group B)(A)	20
(Group C)(AWG)	22~12
(Group C)(V)	150
(Group C)(A)	20
(Group D)(AWG)	22~12
(Group D)(V)	300
(Group D)(A)	10

**CUL**

(Group B)(AWG)	22~12
(Group B)(V)	300
(Group B)(A)	20
(Group C)(AWG)	22~12
(Group C)(V)	150
(Group C)(A)	20
(Group D)(AWG)	22~12
(Group D)(V)	300
(Group D)(A)	10

**CSA**

(AWG)	22~16
(V)	300

(A)

15

VDE

(mm<sup>2</sup>)

0.2~2.5

(V)

630

(A)

24

