



DT-35C-A14W-XX

> :2025-11-05 :1.1

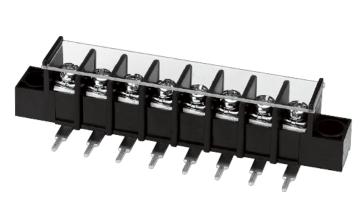

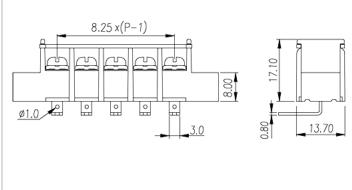

Pitch: 8.25mm, M3, 300V, 20A

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	8.25
	Black (default)
	Screw connection
	With mounting flange
(x) (mm)	0.8x1.2
CB (mm)	1.8~2.0
	Single Row

	PA66
	l l
UL 94	VO
	Copper Alloy
	Tinned

-IEC

. — -			
(V)		630	
(A)		24	
(II/2)(V)		630	
(III/2)(V)		630	
(III/3)(V)		320	
(II/2)(KV	')	6	
(III/2)(K	V)	6	
(III/3)(K	V)	6	
(mm ²	2)	0.2	
(mm ²	2)	2.5	
(mm ²	-)	0.2	
(mm ²	2)	2.5	
2	(mm ²)	1.5	
2	(mm ²)	1.5	
		M3	
Width)(mm)	(Blade thickness x	0.8x4.0	
Philips		PH2	
(N.m)		1.4	
(N.r	m)	0.5	
(N.r	m)	1.4	
		7~8	
-UL			
(UL/CUL Group B)(V)		300	
(UL/CUL Group B)(A)		20	
(UL/CUL Group C)(V)		150	
(UL/CUL Group C)(A)		20	
(UL/CUL Group D)(V)		300	
(UL/CUL Grou	up D)(A)	10	
UL/CUL	AWG	22	
UL/CUL	AWG	12	
UL/CUL	AWG	22	
UL/CUL	AWG	12	



	ı	•	١	
4		۱	ú	٠
١	L	i	×	١

-40	(YES or NO)	YES
-40		120
		-40

UL

(Group B)(AWG)	22~12
(Group B)(V)	300
(Group B)(A)	20
(Group C)(AWG)	22~12
(Group C)(V)	150
(Group C)(A)	20
(Group D)(AWG)	22~12
(Group D)(V)	300
(Group D)(A)	10
	· · · · · · · · · · · · · · · · · · ·

CUL

(Group B)(AWG)	22~12
(Group B)(V)	300
(Group B)(A)	20
(Group C)(AWG)	22~12
(Group C)(V)	150
(Group C)(A)	20
(Group D)(AWG)	22~12
(Group D)(V)	300
(Group D)(A)	10

VDE

(mm ²)	0.2~2.5
(A)	24

