
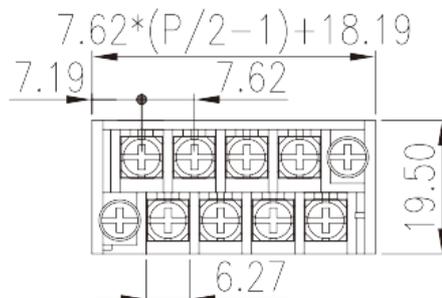


# 2DSAC-XX

>

:2026-05-15 :1.1

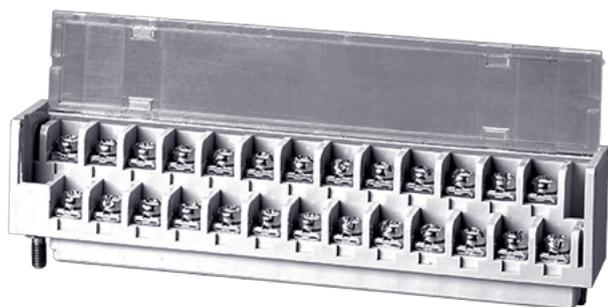

Pitch : 7.62 mm , M3 , 300V , 14A

	Barrier terminal blocks , Screw connection
	Pluggable terminal blocks
(mm)	7.62
	Grey(default)
	Screw connection
	With screw flange
	Double level
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Gold plated
<b>-IEC</b>	
(V)	320
(A)	15



(II/2)(V)		320
(III/2)(V)		320
(III/3)(V)		250
(II/2)(KV)		4
(III/2)(KV)		4
(III/3)(KV)		4
		M3
Width)(mm)	(Blade thickness x	0.8x4.0
Philips		PH2
(N.m)		1
(N.m)		0.5
(N.m)		1
		6~7

**-UL**

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		14
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	22
UL/CUL	AWG	14
UL/CUL	AWG	22
UL/CUL	AWG	14

**&**

(YES or NO)		YES
		130
		-40

**UL**

(Group B)(AWG)		22~14
(Group B)(V)		300
(Group B)(A)		14
(Group C)(AWG)		22~14

(Group C)(V)	300
(Group C)(A)	10

CUL

(Group B)(AWG)	22~14
(Group B)(V)	300
(Group B)(A)	14
(Group C)(AWG)	22~14
(Group C)(V)	300
(Group C)(A)	10

VDE

(V)	320
(A)	15

