


# DT-49-A04W-XX

>

:2026-07-05 :1.1

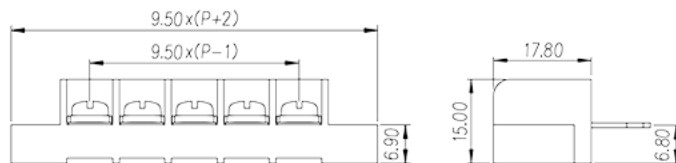

Pitch: 9.50mm , #6-32, 300V, 25A

	Barrier terminal blocks , Screw connection
	Single Row
(mm)	9.50
	Black(default)
	Screw connection
	With mounting flange
(    x    ) (mm)	0.8X2.8
	Single Row
	PA66
	I
UL 94	V0
	Copper Alloy
	Tinned
-IEC	
(A)	32



(II/2)(V)		1000
(III/2)(V)		630
(III/3)(V)		400
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm <sup>2</sup> )		0.5
(mm <sup>2</sup> )		4
(mm <sup>2</sup> )		0.5
(mm <sup>2</sup> )		2.5
2	(mm <sup>2</sup> )	1.5
2	(mm <sup>2</sup> )	1.5
		#6-32
Width)(mm)	(Blade thickness x	0.8x4.0
Philips		PH2
(N.m)		1.4
(N.m)		0.8
(N.m)		1.4
		8~9

**-UL**

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		25
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	22
UL/CUL	AWG	12
UL/CUL	AWG	22
UL/CUL	AWG	12

**&**

(YES or NO)		YES
		11.005
		-40

## UL

(Group B) (AWG)	22~12
(Group B) (V)	300
(Group B) (A)	25
(Group C) (AWG)	22~12
(Group D) (AWG)	22~12
(Group D) (V)	300
(Group D) (A)	10

## CUL

(Group B) (AWG)	22~12
(Group B) (V)	300
(Group B) (A)	25
(Group C) (AWG)	22~12
(Group D) (AWG)	22~12
(Group D) (V)	300
(Group D) (A)	10

## VDE

(mm <sup>2</sup> )	0.5~4
(A)	32

