
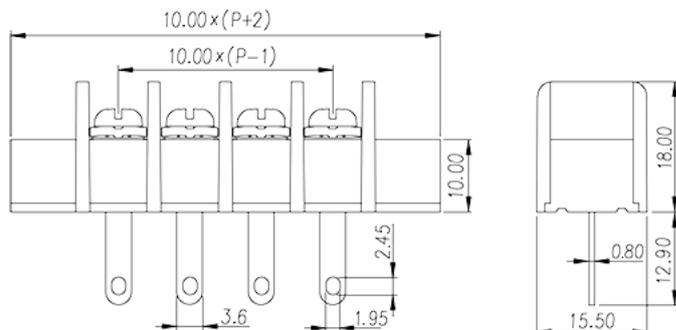


# DT-55-A02W-XX

>

:2026-05-14 :1.1

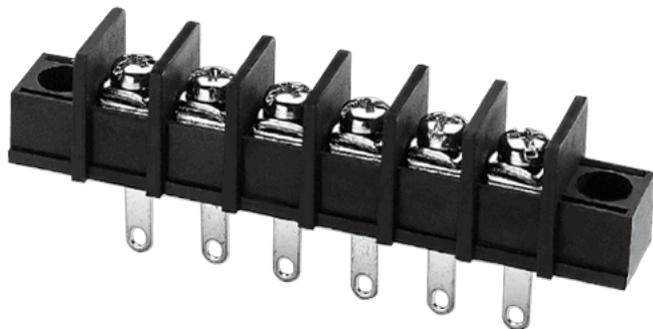

Pitch: 10.00mm , M3.5, 300V, 25A

	Barrier terminal blocks , Screw connection
	Single Row
(mm)	10.00
	Black(default)
	Screw connection
	With mounting flange
( x ) (mm)	0.8X3.6
	Single Row
	PA66
	I
UL 94	V0
	Copper Alloy
	Tinned
-IEC	
(A)	24



(II/2)(V)		1000
(III/2)(V)		630
(III/3)(V)		400
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm <sup>2</sup> )		0.34
(mm <sup>2</sup> )		2.5
(mm <sup>2</sup> )		0.34
(mm <sup>2</sup> )		2.5
2	(mm <sup>2</sup> )	1.5
2	(mm <sup>2</sup> )	1.5
		M3.5
Width)(mm)	(Blade thickness x	0.8x4.0
Philips		PH2
(N.m)		1.8
(N.m)		0.8
(N.m)		1.8
		8~9

**-UL**

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		25
(UL/CUL Group C)(V)		150
(UL/CUL Group C)(A)		25
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	22
UL/CUL	AWG	12
UL/CUL	AWG	22
UL/CUL	AWG	12

**&**

(YES or NO)		YES
-------------	--	-----



	130
	-40

## UL

(Group B)(AWG)	22~12
(Group B)(V)	300
(Group B)(A)	25
(Group C)(AWG)	22~12
(Group C)(V)	150
(Group C)(A)	25
(Group D)(AWG)	22~12
(Group D)(V)	300
(Group D)(A)	10

## CUL

(Group B)(AWG)	22~12
(Group B)(V)	300
(Group B)(A)	25
(Group C)(AWG)	22~12
(Group C)(V)	150
(Group C)(A)	25
(Group D)(AWG)	22~12
(Group D)(V)	300
(Group D)(A)	10

## VDE

(mm <sup>2</sup> )	0.34~2.5
(A)	24

--	--

