
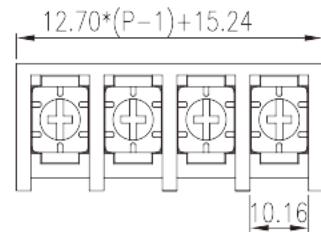


# DT-79-B01W-XX

&gt;

:2025-12-25

:1.1

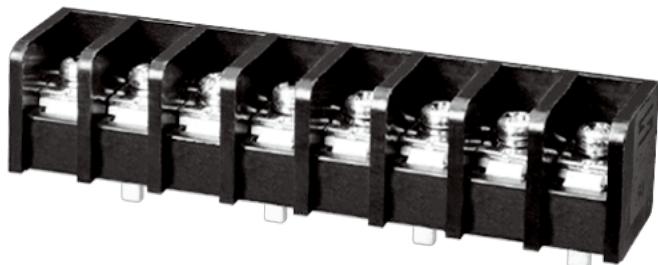

Pitch: 12.70mm , M4, 600V, 45A(str),43A(sol)

	Barrier terminal blocks , Screw connection
	Single Row
(mm)	12.70
	Black(default)
	Screw connection
	Without
(   x   ) (mm)	1.6X3.5
PCB (mm)	4.0
	Single Row

	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Tin PLATED

-IEC

(V)		1000
(A)		41
(II/2)(V)		1000
(III/2)(V)		1000
(III/3)(V)		500
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm <sup>2</sup> )		0.75
(mm <sup>2</sup> )		6
(mm <sup>2</sup> )		0.75
(mm <sup>2</sup> )		6
2 (mm <sup>2</sup> )		4
2 (mm <sup>2</sup> )		4
		M4
Width)(mm)	(Blade thickness x	1.0x5.5
Philips		PH2
(N.m)		1.8
		13~14

### -UL

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		45(str),43(sol)
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		45(str),43(sol)
UL/CUL	AWG	18
UL/CUL	AWG	8
UL/CUL	AWG	18
UL/CUL	AWG	8

### &

(YES or NO)	YES
	120
	-40

## UL

(Group B)(AWG)	18~8
(Group B)(V)	600
(Group B)(A)	45(str),43(sol)
(Group C)(AWG)	18~8
(Group C)(V)	600
(Group C)(A)	45(str),43(sol)

## CUL

(Group B)(AWG)	18~8
(Group B)(V)	600
(Group B)(A)	45(str),43(sol)
(Group C)(AWG)	18~8
(Group C)(V)	600
(Group C)(A)	45(str),43(sol)

## VDE

(mm <sup>2</sup> )	0.75~6
(V)	1000
(A)	41

