
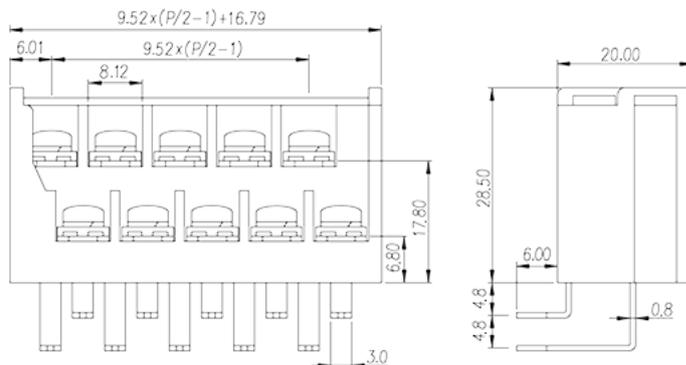


# 4DC-B34W-XX

>

:2026-05-14 :1.2

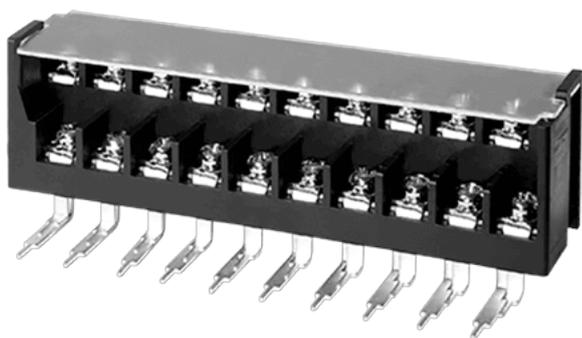

Pitch : 9.52mm , M3.5 , 300V , 20A

	Barrier terminal blocks , Screw connection
	Bi-level terminal blocks
(mm)	9.52
	Black(default)
	Screw connection
	Without
(    x    ) (mm)	0.8x1.0
PCB (mm)	1.6
	Bi-level
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Tinned

-IEC

(A)		24
(II/2)(V)		320
(III/2)(V)		320
(III/3)(V)		250
(II/2)(KV)		4
(III/2)(KV)		4
(III/3)(KV)		4
(mm <sup>2</sup> )		0.75
(mm <sup>2</sup> )		2.5
(mm <sup>2</sup> )		0.75
(mm <sup>2</sup> )		2.5
2	(mm <sup>2</sup> )	1.5
2	(mm <sup>2</sup> )	1.5
		M3.5
Width)(mm)	(Blade thickness x	0.8x4.0
Philips		PH2
	(N.m)	1.4
	(N.m)	0.8
	(N.m)	1.4
		8

### -UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		20
UL/CUL	AWG	18
UL/CUL	AWG	12
UL/CUL	AWG	14
UL/CUL	AWG	12

### &

(YES or NO)		YES
		130
		-40

### UL

(Group B) (AWG)	18~12
(Group B) (V)	300
(Group B) (A)	20

**VDE**

(mm <sup>2</sup> )	0.75~2.5
(A)	24

