
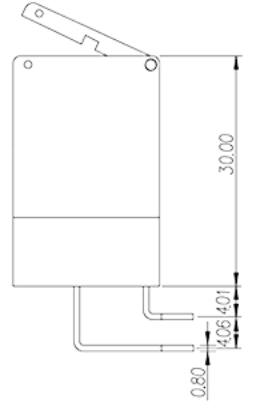
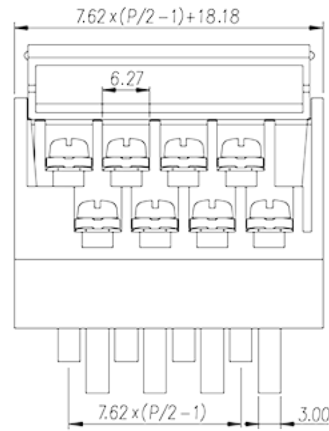


# 2DSCC-14-XX

&gt;

:2026-07-04

:1.1

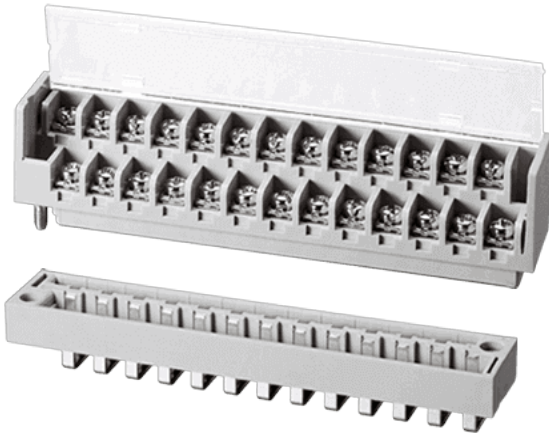

Pitch : 7.62 mm , M3 , 300V , 14A

	Barrier terminal blocks , Screw connection
	Pluggable terminal blocks
(mm)	7.62
	Black(default)
	Screw connection
	With screw flange
( x ) (mm)	0.8x1.0
PCB (mm)	1.6
	Double level
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Gold plated

-IEC

(V)		400
(A)		15
(II/2)(V)		400
(III/2)(V)		320
(III/3)(V)		250
(II/2)(KV)		4
(III/2)(KV)		4
(III/3)(KV)		4
(mm <sup>2</sup> )		0.5
(mm <sup>2</sup> )		1.5
(mm <sup>2</sup> )		0.5
(mm <sup>2</sup> )		1.5
2	(mm <sup>2</sup> )	1
2	(mm <sup>2</sup> )	1
		M3
Width)(mm)	(Blade thickness x	0.8x4.0
Philips		PH2
(N.m)		1
(N.m)		0.5
(N.m)		1
		6~7

### -UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		14
UL/CUL	AWG	22
UL/CUL	AWG	14
UL/CUL	AWG	22
UL/CUL	AWG	14

### &

(YES or NO)		YES
		130
		-40

## UL

(Group B) (AWG)	22~14
(Group B) (V)	300
(Group B) (A)	14

## CUL

(Group B) (AWG)	22~14
(Group B) (V)	300
(Group B) (A)	14

## VDE

(mm <sup>2</sup> )	0.5~1.5
(V)	400
(A)	15

