


# 4DSDAC-XX

&gt;

:2026-02-09

:1.1

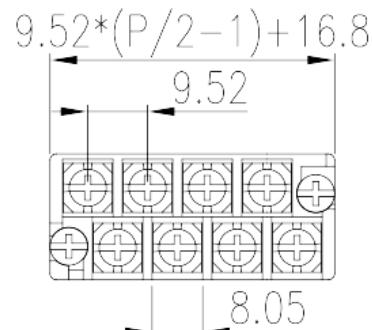

Pitch : 9.50 mm , M3.5 , 300V , 15A

	Barrier terminal blocks , Screw connection
	Pluggable terminal blocks
(mm)	9.50
	Black(default)
	Screw connection
	With screw flange
	Double level
UL 94	PBT IIIa V0
	Copper Alloy Gold plated

-IEC

(V)	250
(A)	24



Delight Through Connections

(II/2)(V)		250
(III/2)(V)		250
(III/3)(V)		160
(II/2)(KV)		4
(III/2)(KV)		4
(III/3)(KV)		4
(mm <sup>2</sup> )		0.75
(mm <sup>2</sup> )		2.5
(mm <sup>2</sup> )		0.75
(mm <sup>2</sup> )		2.5
2 (mm <sup>2</sup> )		1.5
2 (mm <sup>2</sup> )		1.5
		M3.5
Width)(mm)	(Blade thickness x	0.8x4.0
Philips		PH2
(N.m)		1.4
(N.m)		0.8
(N.m)		1.4
		8~9

### -UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		15
UL/CUL AWG		18
UL/CUL AWG		14
UL/CUL AWG		18
UL/CUL AWG		14

### &

(YES or NO)	YES
	130
	-40

### UL



Delight Through Connections

(Group B)(AWG)	18~14
(Group B)(V)	300
(Group B)(A)	15

### CUL

(Group B)(AWG)	18~14
(Group B)(V)	300
(Group B)(A)	15

### VDE

(mm <sup>2</sup> )	0.75~2.5
(V)	250
(A)	24

