
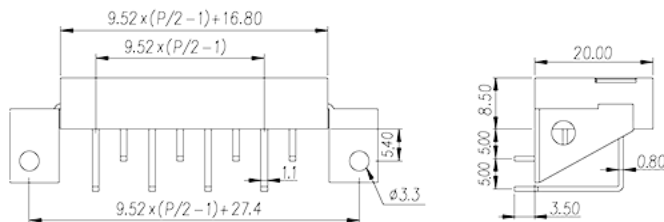


# 4DSDB-14-XX

>

:2026-07-04 :1.1

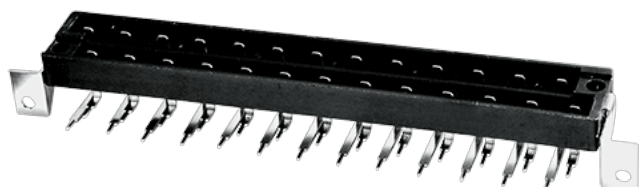

Pitch : 9.50 mm, 300V, 15A

	Barrier terminal blocks, Screw connection
	Pluggable terminal blocks
(mm)	9.50
	Black (default)
	Screw connection
	With threaded flange
(    x    ) (mm)	0.8x1.1
PCB (mm)	1.6~1.7
	Double level
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Gold plated

-IEC



(V)	630
(A)	24
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	320
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10

**&**

(YES or NO)	YES
	130
	-40

**UL**

(Group B)(V)	300
(Group B)(A)	15
(Group C)(V)	300
(Group C)(A)	10

**CUL**

(Group B)(V)	300
(Group B)(A)	15
(Group C)(V)	300
(Group C)(A)	10

**VDE**

(V)	630
(A)	24

