
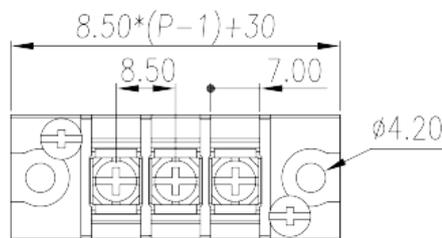


0168-15XX

>

:2026-05-14

:1.1

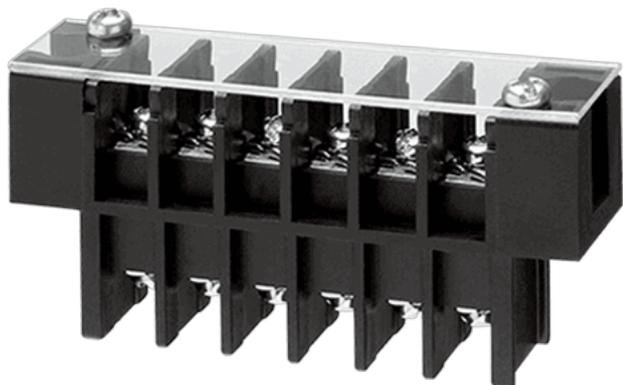

Pitch: 8.5mm, M3.5, 300V, 20A

	Barrier terminal blocks, Screw connection
	Panel Feed Through Terminal Blocks
(mm)	8.5
	Black (default)
	Screw connection
	With mounting flange
	Single level
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Tinned
	-IEC
(A)	32
(II/2)(V)	630



(III/2)(V)		600
(III/3)(V)		400
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm ²)		0.34
(mm ²)		4
(mm ²)		0.34
(mm ²)		4
2	(mm ²)	2.5
2	(mm ²)	4
		M3.5
Width)(mm)	(Blade thickness x	0.8x4.0
Philips		PH2
(N.m)		1
(N.m)		0.5
(N.m)		1
		8~9

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		20
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	22
UL/CUL	AWG	12
UL/CUL	AWG	22
UL/CUL	AWG	12

&

(YES or NO)		YES
		130
		-40

UL

(Group B)(AWG)	22~12
(Group B)(V)	300
(Group B)(A)	20
(Group D)(AWG)	22~12
(Group D)(V)	300
(Group D)(A)	10

CUL

(Group B)(AWG)	22~12
(Group B)(V)	300
(Group B)(A)	20
(Group D)(AWG)	22~12
(Group D)(V)	300
(Group D)(A)	10

