



2DSB-01-XX

> :2025-11-05 :1.1

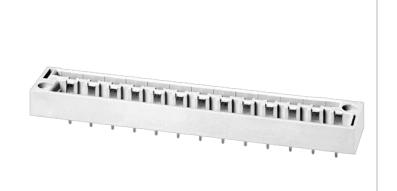

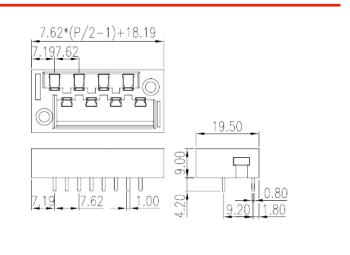

Pitch: 7.62 mm, 300V, 14A

	Barrier terminal blocks, Screw connection
	Pluggable terminal blocks
(mm)	7.62
	Grey(default)
	Screw connection
	With mounting flange
(x) (mm)	0.8x1.0
PCB (mm)	1.6
	Double level

	PBT
	IIIa
UL 94	VO
	Copper Alloy
	Gold plated

-IEC

(V)	400
(A)	15
(II/2)(V)	400
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
-UL	
(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	14
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
&	
(YES or NO)	YES
	130
	-40
UL	
(Group B)(V)	300
(Group B)(A)	14
(Group C)(V)	300
(Group C)(A)	10
CUL	
(Group B)(V)	300
(Group B)(A)	14
(Group C)(V)	300
(Group C)(A)	10
VDE	
(V)	400
(A)	15

