
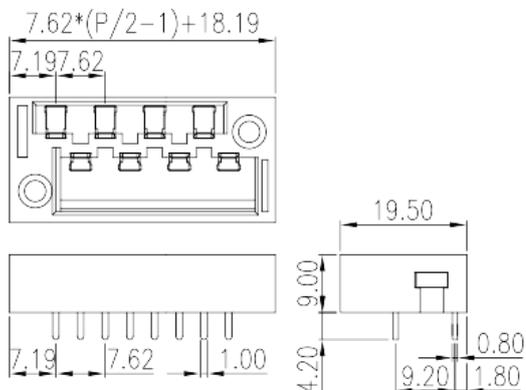


2DSB-01-XX

>

:2026-05-14 :1.1

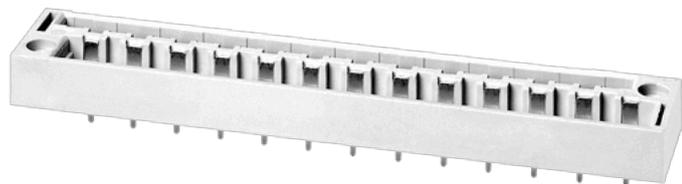

Pitch : 7.62 mm , 300V , 14A

	Barrier terminal blocks , Screw connection
	Pluggable terminal blocks
(mm)	7.62
	Grey(default)
	Screw connection
	With mounting flange
(x) (mm)	0.8x1.0
PCB (mm)	1.6
	Double level
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Gold plated

-IEC



(V)	400
(A)	15
(II/2)(V)	400
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	14
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10

&

(YES or NO)	YES
	130
	-40

UL

(Group B)(V)	300
(Group B)(A)	14
(Group C)(V)	300
(Group C)(A)	10

CUL

(Group B)(V)	300
(Group B)(A)	14
(Group C)(V)	300
(Group C)(A)	10

VDE

(V)	400
(A)	15

