
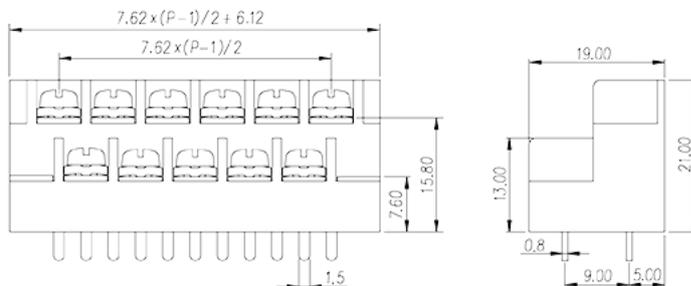


# 0032-12XX

>

:2026-05-14 :1.2

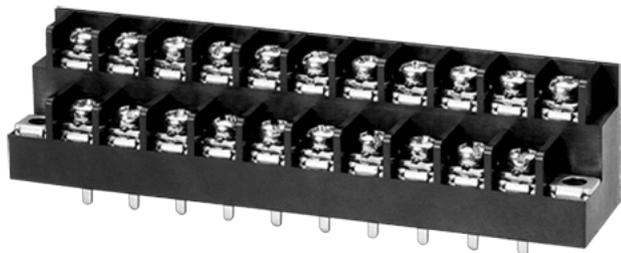

Pitch : 7.62mm , M3 , 300V , 15A

	Barrier terminal blocks , Screw connection
	Bi-level terminal blocks
(mm)	7.62
	Black(default)
	Screw connection
	Direct mounting with mount flange
( x ) (mm)	0.8x1.5
PCB (mm)	1.9~2.0
	Bi-level
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Tinned

-IEC

(A)		17.5
(II/2)(V)		320
(III/2)(V)		320
(III/3)(V)		200
(II/2)(KV)		4
(III/2)(KV)		4
(III/3)(KV)		4
(mm <sup>2</sup> )		0.2
(mm <sup>2</sup> )		1.5
(mm <sup>2</sup> )		0.2
(mm <sup>2</sup> )		1.5
2	(mm <sup>2</sup> )	1
2	(mm <sup>2</sup> )	1
		M3
Width)(mm)	(Blade thickness x	0.8x4.0
Philips		PH2
(N.m)		0.8
(N.m)		0.5
(N.m)		0.8
		7~8

### -UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		15
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	22
UL/CUL	AWG	14
UL/CUL	AWG	22
UL/CUL	AWG	14

### &

(YES or NO)		YES
		130

-40

## UL

(Group B) (AWG)	22~14
(Group B) (V)	300
(Group B) (A)	15
(Group D) (AWG)	22~14
(Group D) (V)	300
(Group D) (A)	10

## VDE

(mm <sup>2</sup> )	0.2~1.5
(A)	17.5

