


2EHDRS-XXP

PCB > :2025-11-05 :1.1



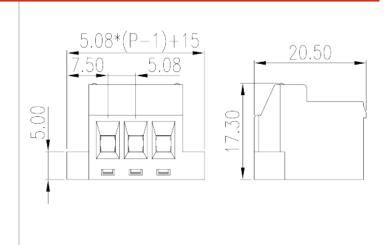

Pitch: 5.08 mm, 300V, 12/15A

	Special type terminal blocks, Screw connection
	Special type terminal blocks
(mm)	5.08
	Green (default)
	Screw connection
	With mounting flange
(mm)	5.08*(P-1)+15
(mm)	20.50
(mm)	17.3
()	02~20P

	PA
	I
UL 94	VO
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	630
(A)	18
(II/2)(V)	600
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.5
(mm ²)	2.5
(mm ²)	0.5
(mm ²)	2.5
(mm ²)	0.25
(mm²)	2.5
(mm ²)	0.25
(mm ²)	1.5
2 (mm²)	1.5
2 (mm²)	1.5
(mm ²) , ,	0.25
(mm²) , ,	0.75
2 (mm²)	0.5
2 (mm²)	1.5
	M2.5
(Blade thickness x Width)(mm)	0.6x3.5
Philips	PH1
(N.m)	0.75
	7~8

-UL

(UL/CUL Group B)(V)		300
(UL/CUL (Group B)(A)	12/15
UL/CUL	AWG	24/28
UL/CUL	AWG	12/16
UL/CUL	AWG	24/28
UL/CUL	AWG	12/16

&

	(YES or NO)	YES
가	(YES or NO)	YES
		115
		-40

UL

(Group B)(AWG)	28~12
(Group B)(V)	300
(Group B)(A)	12/15

CUL

(Group B)(AWG)	28~12
(Group B)(V)	300
(Group B)(A)	12/15

