


## DT-29-A03W-XX

> :2025-11-05 :1.1



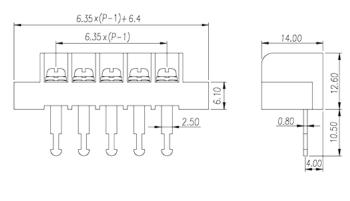

Pitch: 6.35mm, M2.6, 300V, 15A

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	6.35
	Black (default)
	Screw connection
	With mounting flange
(mm)	6.35*(P-1)+19.1
(mm)	14.00
(mm)	12.60
( x ) (mm)	0.8x2.5
( )	02P~33P
	Single Row

	PA66
	I
UL 94	V0
	500M at DC 500V

		COPPER ALLOY	
		Tin PLATED	
-IEC			
(V)		320	
(A)		17.5	
(II/2)(V)		630	
(III/2)(V)		320	
(III/3)(V)		200	
(II/2)(K	(V)	4	
(III/2)(KV)		4	
(111/3)(	KV)	4	
(mm	2)	0.34	
(mm	2 )	1.5	
(mm	2 )	0.34	
(mm	2)	1.5	
:	2 (mm²)	1	
	2 (mm²)	1	
		M2.6	
(Blade thickness x Width)(mm)		0.6x0.35	
Philips		PH1	
(N.m)		0.5	
(N.m)		0.4	
(N.m)		0.5	
		6~7	
-UL			
(UL/CUL Group B)(V)		300	
(UL/CUL Group B)(A)		15	
(UL/CUL Group D)(V)		300	
(UL/CUL Group D)(A)		10	
UL/CUL	AWG	22	
UL/CUL	AWG	16	
UL/CUL	AWG	22	



JL/CUL	AWG	16
&		
(YES or NO)		YES
		120
		-40
JL		
(Group B)(AV	VG)	22~16
(Group B)(V	)	300
(Group B)(A	)	15
(Group D)(A\	VG)	22~16
(Group D)(V	)	300
(Group D)(A)		10
CUL		
(Group B)(AWG)		22~16
(Group B) (V)		300
(Group B) (A		15
(Group D) (A)		22~16
(Group D) (V		300 10
(Group D)(A)		10
CSA		
(AWG)		22~16
(V)		300
(A)		10

