
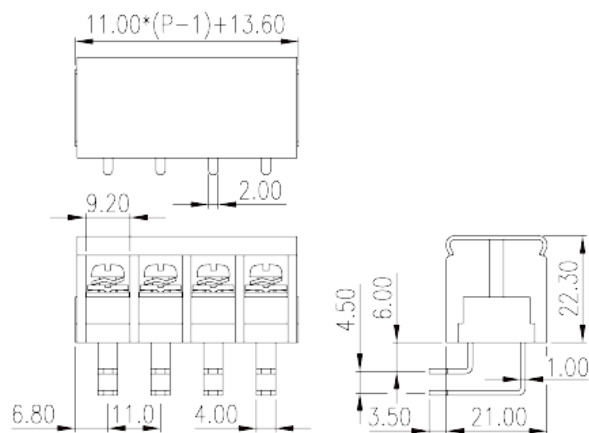


# DT-66-C11W-XX

>

:2026-07-05 :1.1

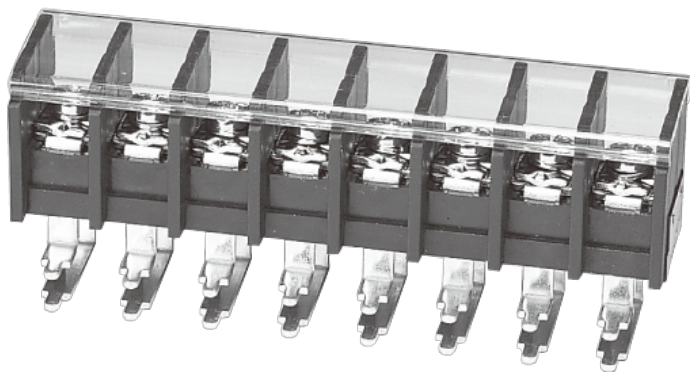

Pitch: 11.00mm , M4, 300V, 40A

	Barrier terminal blocks , Screw connection
	Single Row
(mm)	11.00
	Black(default)
	Screw connection
	Without
( x ) (mm)	1.0X2.0
PCB (mm)	2.6~2.7
	Single Row
	PBT
	III
UL 94	V0
	Copper Alloy
	Tinned

-IEC

(V)		800
(A)		41
(II/2)(V)		800
(III/2)(V)		800
(III/3)(V)		400
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm <sup>2</sup> )		0.75
(mm <sup>2</sup> )		6
(mm <sup>2</sup> )		0.75
(mm <sup>2</sup> )		6
2	(mm <sup>2</sup> )	4
2	(mm <sup>2</sup> )	4
		M4
Width)(mm)	(Blade thickness x	1.0x5.5
Philips		PH2
(N.m)		1.7
(N.m)		1.2
(N.m)		1.7
		12~13

### -UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		40
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	18
UL/CUL	AWG	8
UL/CUL	AWG	18
UL/CUL	AWG	8

### &

(YES or NO)		YES
-------------	--	-----

	130
	-40

## UL

(Group B)(AWG)	18~8
(Group B)(V)	300
(Group B)(A)	40
(Group D)(AWG)	18~8
(Group D)(V)	300
(Group D)(A)	10

## CUL

(Group B)(AWG)	18~8
(Group B)(V)	300
(Group B)(A)	40
(Group D)(AWG)	18~8
(Group D)(V)	300
(Group D)(A)	10

## VDE

(mm <sup>2</sup> )	0.75~6
(V)	800
(A)	41

