



0032-0109

> :2025-11-05 :1.1

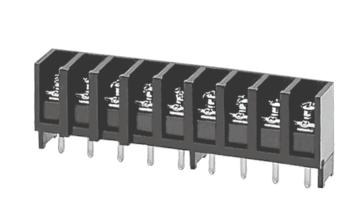

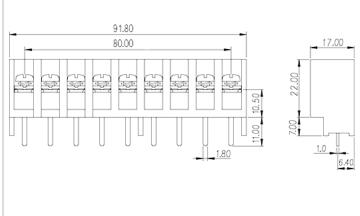

Pitch: 10.00mm, M4, 300V, 30 Str/25Sol

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	10
	Black (default)
	Screw connection
	Without
(x) (mm)	1.0X1.8
PCB (mm)	2.5
	Single Row

	PBT
	IIIa
UL 94	VO
	Copper Alloy
	Tinned

-IEC

(A)	32
(II/2)(V)	1000
(III/2)(V)	1000
(III/3)(V)	500
(II/2)(KV)	8
(III/2)(KV)	8
(III/3)(KV)	8
(mm²)	0.75
(mm²)	4
(mm²)	0.75
(mm²)	4
2 (mm²)	2.5
2 (mm²)	2.5
	M4
(Blade thickness x Width)(mm)	1.0x5.5
Philips	PH2
(N.m)	1.6
(N.m)	1.2
(N.m)	1.6
	10~11

-UL

(UL/CUL (Group B)(V)	300
·	Group B)(A)	30 Str/25 Sol
•	Group C)(V)	300
(UL/CUL (Group C)(A)	30 Str/25 Sol
(UL/CUL (Group D)(V)	600
(UL/CUL (Group D)(A)	5
UL/CUL	AWG	18
UL/CUL	AWG	10
UL/CUL	AWG	18
UL/CUL	AWG	10

&



(YES or NO)	YES
	120
	-40
11	
JL 	
(Group B)(AWG)	18~10
(Group B)(V)	300
(Group B)(A)	30 Str/25 Sol
(Group C)(AWG)	18~10
(Group C)(V)	300
(Group C)(A)	30 Str/25 SoI
(Group D)(AWG)	18~10
(Group D)(V)	600
(Group D)(A)	5
CUL	
(Group B)(AWG)	18~10
(Group B)(AWG) (Group B)(V)	18~10 300
(Group B)(V)	300
(Group B)(V) (Group B)(A)	300 30 Str/25 Sol
(Group B)(V) (Group B)(A) (Group C)(AWG)	300 30 Str/25 Sol 18~10
(Group B)(V) (Group B)(A) (Group C)(AWG) (Group C)(V)	300 30 Str/25 Sol 18~10 300
(Group B)(V) (Group B)(A) (Group C)(AWG) (Group C)(V) (Group C)(A)	300 30 Str/25 Sol 18~10 300 30 Str/25 Sol

