
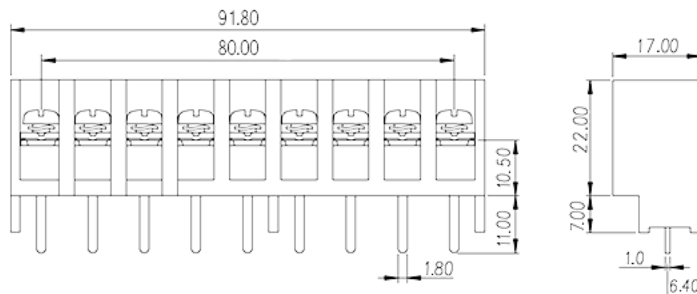


0032-0109

>

:2026-07-04 :1.1

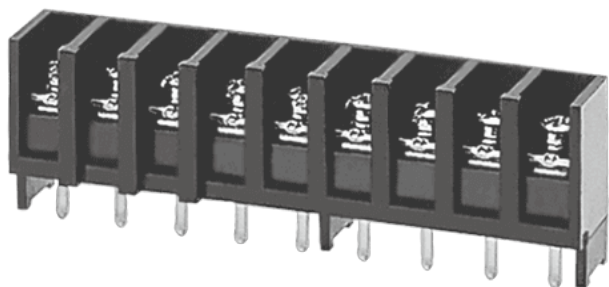

Pitch: 10.00mm, M4, 300V, 30 Str/25Sol

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	10
	Black (default)
	Screw connection
	Without
(x) (mm)	1.0X1.8
PCB (mm)	2.5
	Single Row
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Tinned

-IEC

(A)		32
(II/2)(V)		1000
(III/2)(V)		1000
(III/3)(V)		500
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm ²)		0.75
(mm ²)		4
(mm ²)		0.75
(mm ²)		4
2	(mm ²)	2.5
2	(mm ²)	2.5
		M4
Width)(mm)	(Blade thickness x	1.0x5.5
Philips		PH2
(N.m)		1.6
(N.m)		1.2
(N.m)		1.6
		10~11

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		30 Str/25 Sol
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		30 Str/25 Sol
(UL/CUL Group D)(V)		600
(UL/CUL Group D)(A)		5
UL/CUL	AWG	18
UL/CUL	AWG	10
UL/CUL	AWG	18
UL/CUL	AWG	10

&



(YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	18~10
(Group B)(V)	300
(Group B)(A)	30 Str/25 Sol
(Group C)(AWG)	18~10
(Group C)(V)	300
(Group C)(A)	30 Str/25 Sol
(Group D)(AWG)	18~10
(Group D)(V)	600
(Group D)(A)	5

CUL

(Group B)(AWG)	18~10
(Group B)(V)	300
(Group B)(A)	30 Str/25 Sol
(Group C)(AWG)	18~10
(Group C)(V)	300
(Group C)(A)	30 Str/25 Sol
(Group D)(AWG)	18~10
(Group D)(V)	600
(Group D)(A)	5

--	--

