



PPAC-25

PCB

>

:2026-02-09

:1.2

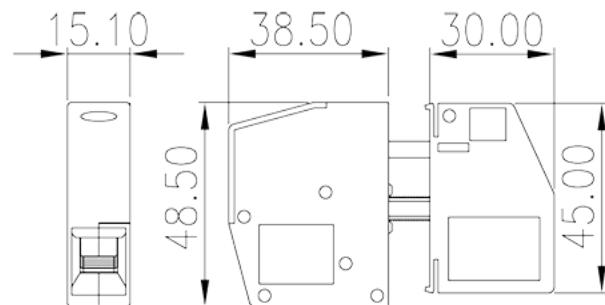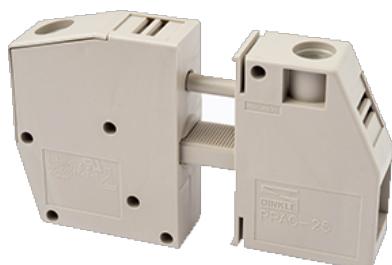

M5, 600V, 115A

	Panel Feed-Through, Screw Connection
	Panel Feed-Through
	Grey (default)
	Screw connection
	Without
(mm)	15.1
(mm)	38.5+30
(mm)	48.5
()	1P

	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)		600
(A)		115
(III/3)(V)		800
(III/3)(KV)		8
(mm ²)		6
(mm ²)		35
(mm ²)		6
(mm ²)		35
(mm ²) , , ,		6
(mm ²) , , ,		16
(mm ²) , , ,		6
(mm ²) , , ,		16
2 (mm ²)		6
2 (mm ²)		10
2 (mm ²)		6
2 (mm ²)		10
2 (mm ²) , , ,		0.5
2 (mm ²) , , ,		10
2 (mm ²) , , ,		0.5
2 (mm ²) , , ,		6
Philips		M5
		PZ2
(N.m)		3.38~3.9
(N.m)		2
(N.m)		3.9
		19

-UL

(UL/CUL Group B)(V)	600
---------------------	-----

(UL/CUL Group B)(A)		115
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		115
(UL/CUL Group D)(V)		600
(UL/CUL Group D)(A)		5
UL/CUL	AWG	8
UL/CUL	AWG	2
UL/CUL	AWG	8
UL/CUL	AWG	2

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	8~2
(Group B)(V)	600
(Group B)(A)	115
(Group C)(AWG)	8~2
(Group C)(V)	600
(Group C)(A)	115

CUL

(Group B)(AWG)	8~2
(Group B)(V)	600
(Group B)(A)	115
(Group C)(AWG)	8~2
(Group C)(V)	600
(Group C)(A)	115

VDE

(mm ²)	6~35
(V)	800

(A)

125

