



DT-5C-B84W-XX

> :2025-11-05 :1.1

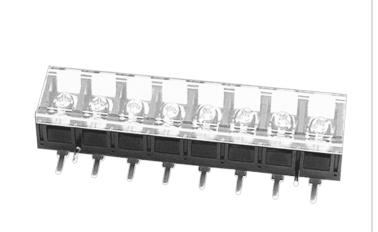



Pitch: 10.00mm, M3.5, 300V, 20A

Barrier terminal blocks, Screw connection
Single Row
10.00
Black (default)
Screw connection
Without
0.8X1.5
2
Single Row

	PBT
	IIIa
UL 94	VO
	Copper Alloy
	Tinned

-IEC

14

22

(V)		630
(A)		24
(II/2)(V)		1000
(III/2)(V)		630
(III/3)(V)		400
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm ²)		0.2
(mm ²)		2.5
(mm ²)		0.2
(mm ²)		2.5
2	(mm ²)	1.5
2	(mm ²)	1.5
		M3.5
Width) (mm)	(Blade thickness x	0.8x4.0
Philips		PH2
(N.m)		1.1
(N.m)		0.8
(N.m)		1.1
		9~10
-UL		
(UL/CUL Group E	3)(V)	300
(UL/CUL Group B)(A)		20
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		20
(UL/CUL Group D)(V)		300
(UL/CUL Group I	D)(A)	10
UL/CUL	AWG	14
UL/CUL	AWG	22
,		

&

UL/CUL

UL/CUL

AWG

AWG

(YES or NO)	YES
	130
	-40
JL	
(Group B)(AWG)	22~14
(Group B)(V)	300
(Group B)(A)	20
(Group C)(AWG)	22~14
(Group C)(V)	300
(Group C)(A)	20
(Group D)(AWG)	22~14
(Group D)(V)	300
(Group D)(A)	10
CUL	
(Group B)(AWG)	22~14
(Group B)(V)	300
(Group B)(A)	20
(Group C)(AWG)	22~14
(Group C)(V)	300
(Group C)(A)	20
(Group D)(AWG)	22~14
(Group D)(V)	300
(Group D)(A)	10
VDE	
(mm ²)	0.2~2.5
(V)	630
(A)	24

