
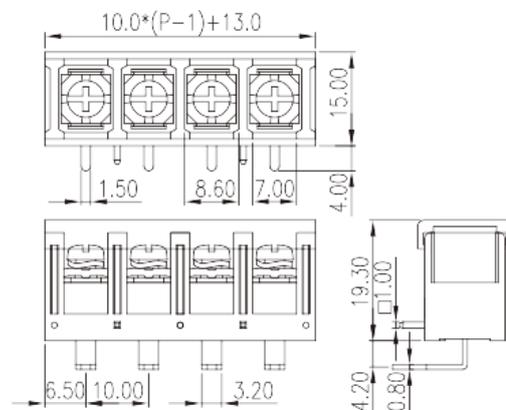


DT-5C-B84W-XX

>

:2026-05-14 :1.1

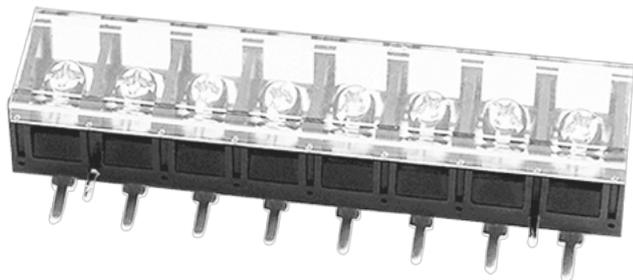

Pitch: 10.00mm, M3.5, 300V, 20A

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	10.00
	Black (default)
	Screw connection
	Without
(x) (mm)	0.8X1.5
PCB (mm)	2
	Single Row
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Tinned

-IEC



(V)		630
(A)		24
(II/2)(V)		1000
(III/2)(V)		630
(III/3)(V)		400
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm ²)		0.2
(mm ²)		2.5
(mm ²)		0.2
(mm ²)		2.5
2	(mm ²)	1.5
2	(mm ²)	1.5
		M3.5
Width)(mm)	(Blade thickness x	0.8x4.0
Philips		PH2
(N.m)		1.1
(N.m)		0.8
(N.m)		1.1
		9~10

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		20
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		20
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	14
UL/CUL	AWG	22
UL/CUL	AWG	14
UL/CUL	AWG	22

&



(YES or NO)	YES
	130
	-40

UL

(Group B)(AWG)	22~14
(Group B)(V)	300
(Group B)(A)	20
(Group C)(AWG)	22~14
(Group C)(V)	300
(Group C)(A)	20
(Group D)(AWG)	22~14
(Group D)(V)	300
(Group D)(A)	10

CUL

(Group B)(AWG)	22~14
(Group B)(V)	300
(Group B)(A)	20
(Group C)(AWG)	22~14
(Group C)(V)	300
(Group C)(A)	20
(Group D)(AWG)	22~14
(Group D)(V)	300
(Group D)(A)	10

VDE

(mm ²)	0.2~2.5
(V)	630
(A)	24

--	--

