
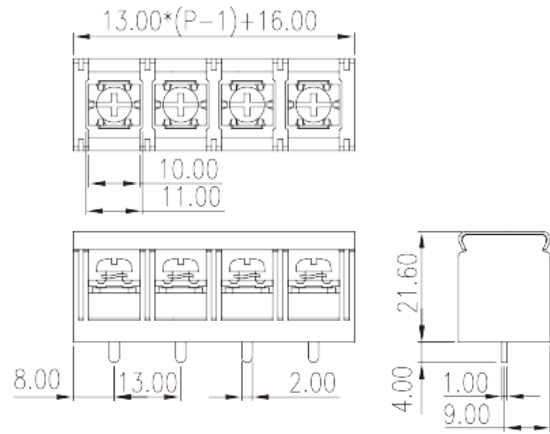


DT-7C-B01W-XX

>

:2026-07-05

:1.1

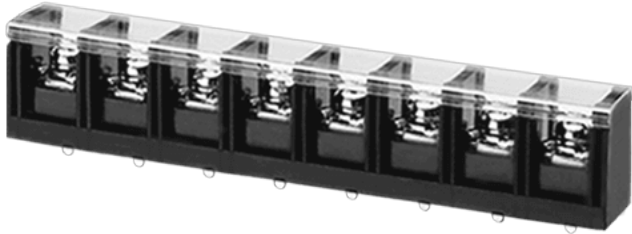

Pitch: 13.00mm , M4, 600V, 40A

	Barrier terminal blocks , Screw connection
	Single Row
(mm)	13.00
	Black (default)
	Screw connection
	Without
(x) (mm)	1.0x2.0
PCB (mm)	2.7
	Single Row
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Tinned

-IEC



(A)		41
(II/2)(V)		1000
(III/2)(V)		1000
(III/3)(V)		500
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm ²)		0.5
(mm ²)		6
(mm ²)		0.5
(mm ²)		6
2	(mm ²)	4
2	(mm ²)	4
		M4
Width)(mm)	(Blade thickness x	1.0x5.5
Philips		PH2
(N.m)		1.6
(N.m)		1.2
(N.m)		1.6
		10~11

-UL

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		40
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		40
(UL/CUL Group D)(V)		600
(UL/CUL Group D)(A)		5
UL/CUL	AWG	18
UL/CUL	AWG	8
UL/CUL	AWG	18
UL/CUL	AWG	8

&



(YES or NO)	YES
	130
	-40

UL

(Group B)(AWG)	18~8
(Group B)(V)	600
(Group B)(A)	40
(Group C)(AWG)	18~8
(Group C)(V)	600
(Group C)(A)	40
(Group D)(AWG)	18~8
(Group D)(V)	600
(Group D)(A)	5

CUL

(Group B)(AWG)	18~8
(Group B)(V)	600
(Group B)(A)	40
(Group C)(AWG)	18~8
(Group C)(V)	600
(Group C)(A)	40
(Group D)(AWG)	18~8
(Group D)(V)	600
(Group D)(A)	5

--	--

