
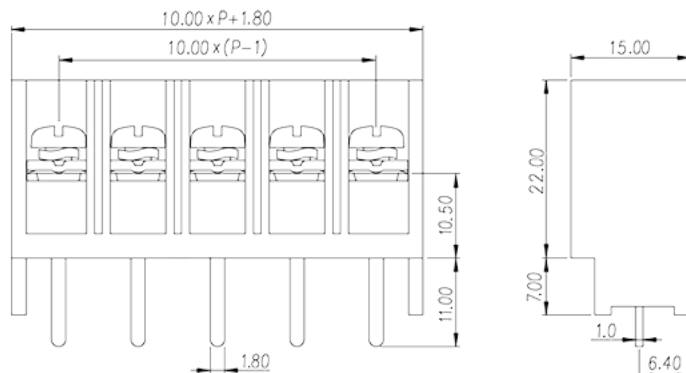


0032-0105

>

:2026-05-14 :1.1

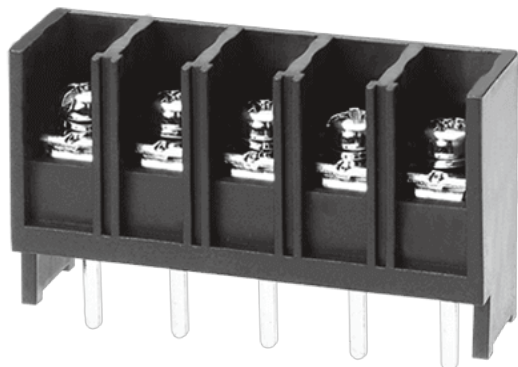

Pitch: 10.00mm, M4, 300V, 30 Str / 25 Sol

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	10
	Black (default)
	Screw connection
	Without
	Wave Soldering
(mm)	51.8
(mm)	15
(mm)	29
(x) (mm)	1.0x1.8
PCB (mm)	2.5
()	08P
	Single Row
	PBT
	IIIa



UL 94	V0
	1000M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	1000
(A)	32
(II/2)(V)	1000
(III/2)(V)	1000
(III/3)(V)	500
(II/2)(KV)	8
(III/2)(KV)	8
(III/3)(KV)	8
(mm ²)	0.75
(mm ²)	4
(mm ²)	0.75
(mm ²)	4
2 (mm ²)	2.5
2 (mm ²)	2.5
	M4
Width)(mm) (Blade thickness x	1.0x5.5
Philips	PH2
(N.m)	1.6
(N.m)	1.2
(N.m)	1.6
	10~11

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	30 Str / 25 Sol
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	30 Str / 25 Sol
(UL/CUL Group D)(V)	600



(UL/CUL Group D)(A)		5
UL/CUL	AWG	18
UL/CUL	AWG	10
UL/CUL	AWG	18
UL/CUL	AWG	10

&

(YES or NO)		YES
		120
		-40

UL

(Group B)(AWG)		18~10
(Group B)(V)		300
(Group B)(A)		30 Str / 25 Sol
(Group C)(AWG)		18~10
(Group C)(V)		300
(Group C)(A)		30 Str / 25 Sol
(Group D)(AWG)		18~10
(Group D)(V)		600
(Group D)(A)		5

CUL

(Group B)(AWG)		18~10
(Group B)(V)		300
(Group B)(A)		30 Str / 25 Sol
(Group C)(AWG)		18~10
(Group C)(V)		300
(Group C)(A)		30 Str / 25 Sol
(Group D)(AWG)		18~10
(Group D)(V)		600
(Group D)(A)		5

