
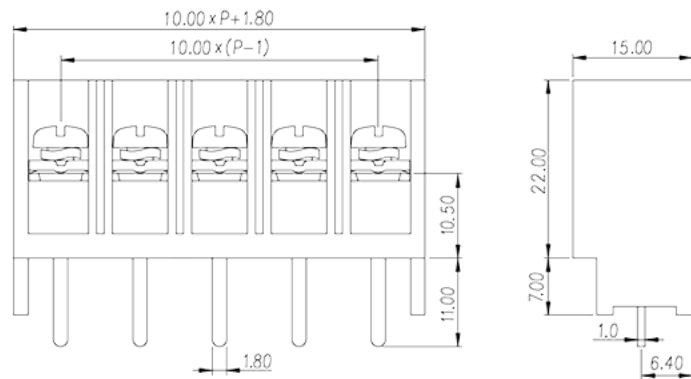


# 0032-0105

&gt;

:2026-02-09

:1.1

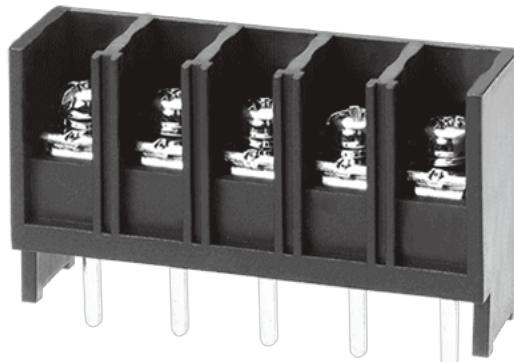

Pitch: 10.00mm, M4, 300V, 30 Str / 25 Sol

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	10
	Black (default)
	Screw connection
	Without
	Wave Soldering
(mm)	51.8
(mm)	15
(mm)	29
(    x    ) (mm)	1.0x1.8
PCB (mm)	2.5
(    )	08P
	Single Row

	PBT
	IIIa



Delight Through Connections

UL 94

V0

1000M at DC 500V

COPPER ALLOY

Tin PLATED

**-IEC**

(V)		1000
(A)		32
(II/2)(V)		1000
(III/2)(V)		1000
(III/3)(V)		500
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm <sup>2</sup> )		0.75
(mm <sup>2</sup> )		4
(mm <sup>2</sup> )		0.75
(mm <sup>2</sup> )		4
2	(mm <sup>2</sup> )	2.5
2	(mm <sup>2</sup> )	2.5
		M4
Width)(mm)	(Blade thickness x	1.0x5.5
Philips		PH2
(N.m)		1.6
(N.m)		1.2
(N.m)		1.6
		10~11

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	30 Str / 25 Sol
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	30 Str / 25 Sol
(UL/CUL Group D)(V)	600

(UL/CUL Group D)(A)		5
UL/CUL	AWG	18
UL/CUL	AWG	10
UL/CUL	AWG	18
UL/CUL	AWG	10

&amp;

(YES or NO)	YES
	120
	-40

**UL**

(Group B)(AWG)	18~10
(Group B)(V)	300
(Group B)(A)	30 Str / 25 Sol
(Group C)(AWG)	18~10
(Group C)(V)	300
(Group C)(A)	30 Str / 25 Sol
(Group D)(AWG)	18~10
(Group D)(V)	600
(Group D)(A)	5

**CUL**

(Group B)(AWG)	18~10
(Group B)(V)	300
(Group B)(A)	30 Str / 25 Sol
(Group C)(AWG)	18~10
(Group C)(V)	300
(Group C)(A)	30 Str / 25 Sol
(Group D)(AWG)	18~10
(Group D)(V)	600
(Group D)(A)	5

