



0032-11XX

> :2025-11-05 :1.1

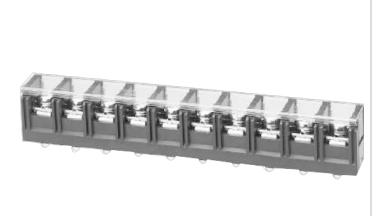



Pitch: 16.00mm, M6, 600V, 50/80A

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	16
	Black (default)
	Screw connection
	Without
(x) (mm)	1.6X4.0
CB (mm)	5.2~5.3
	Single Row

	PBT
	IIIa
UL 94	VO
	Copper Alloy
	Tinned

-IEC

(A)		41
(II/2)(V)		1000
(III/2)(V)		1000
(III/3)(V)		630
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm ²)		1.5
(mm ²)		6
(mm ²)		1.5
(mm ²)		6
2	(mm ²)	4
2 (mm²)	(mm ²)	4
		M6
Width)(mm)	Blade thickness x	1.0x5.5
Philips		PH3
(N.m)		3.1
(N.m)		2.5
(N.m)		3.1
		13~14
-UL		
(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		50/80
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		50/80
UL/CUL	AWG	14/6
UL/CUL	AWG	8/4
UL/CUL	AWG	14/6
UL/CUL	AWG	8/4
&		
(YES or NO)		YES
		120

	-40
UL	
(Group B)(AWG)	14~6

(Group B)(V)	600
(Group B)(A)	50/80
(Group C)(AWG)	14~6
(Group C)(V)	600
(Group C)(A)	50/80

CUL

(Group B)(AWG)	14~6
(Group B)(V)	600
(Group B)(A)	50/80
(Group C)(AWG)	14~6
(Group C)(V)	600
(Group C)(A)	50/80

