
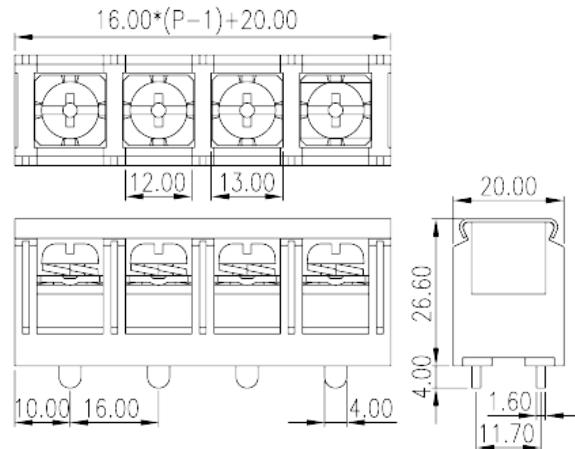


# 0032-11XX

&gt;

:2026-02-09

:1.1

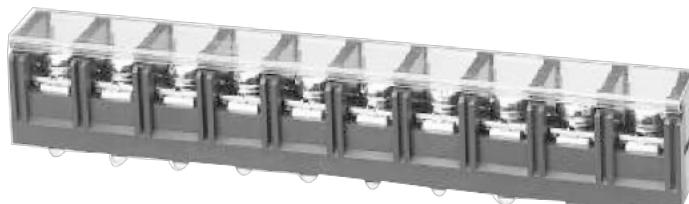

Pitch: 16.00mm , M6, 600V, 50/80A

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	16
	Black (default)
	Screw connection
	Without
( x ) (mm)	1.6X4.0
PCB (mm)	5.2~5.3
	Single Row

	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Tinned

-IEC

(A)		41
(II/2)(V)		1000
(III/2)(V)		1000
(III/3)(V)		630
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm <sup>2</sup> )		1.5
(mm <sup>2</sup> )		6
(mm <sup>2</sup> )		1.5
(mm <sup>2</sup> )		6
2 (mm <sup>2</sup> )		4
2 (mm <sup>2</sup> )		4
		M6
Width)(mm)	(Blade thickness x	1.0x5.5
Philips		PH3
(N.m)		3.1
(N.m)		2.5
(N.m)		3.1
		13~14

### -UL

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		50/80
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		50/80
UL/CUL	AWG	14/6
UL/CUL	AWG	8/4
UL/CUL	AWG	14/6
UL/CUL	AWG	8/4

### &


(YES or NO)	YES
	120

## UL

(Group B)(AWG)	14~6
(Group B)(V)	600
(Group B)(A)	50/80
(Group C)(AWG)	14~6
(Group C)(V)	600
(Group C)(A)	50/80

## CUL

(Group B)(AWG)	14~6
(Group B)(V)	600
(Group B)(A)	50/80
(Group C)(AWG)	14~6
(Group C)(V)	600
(Group C)(A)	50/80

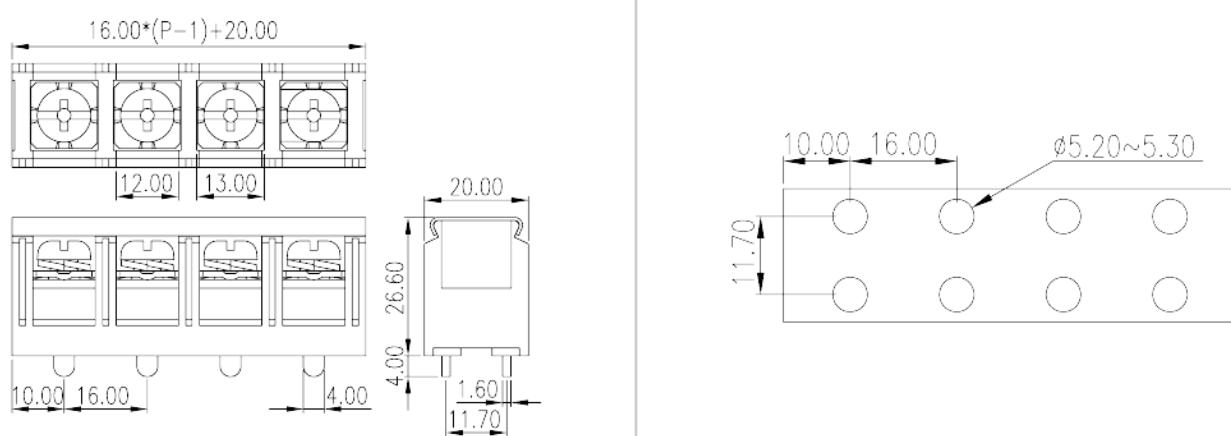



Delight Through Connections

---

: +886-2-8069-9000 / : [service@dinkle.com](mailto:service@dinkle.com)

© DINKLE ENTERPRISE CO ,LTD. ALL RIGHT RESERVED