


0032-14XX

>

:2026-02-09

:1.1

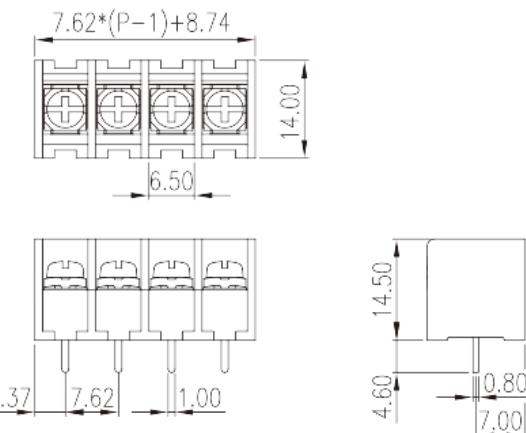

Pitch: 7.62mm, M3, 250V, 10A

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	7.62
	Black (default)
	Screw connection
	Without
	Wave Soldering
(mm)	7.62*(P-1)+8.74
(mm)	14.00
(mm)	14.50
(x) (mm)	0.8x1.0
PCB (mm)	1.5~1.7
()	02P~13P
	Single Row

	PBT
	IIIa



Delight Through Connections

UL 94

V0

1000M at DC 500V

COPPER ALLOY

Tin PLATED

-IEC

(V)		630
(A)		17.5
(II/2)(V)		630
(III/2)(V)		630
(III/3)(V)		400
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm ²)		0.2
(mm ²)		1.5
(mm ²)		0.2
(mm ²)		1.5
2	(mm ²)	1
2	(mm ²)	1
		M3
Width)(mm)	(Blade thickness x	0.8x4.0
Philips		PH2
(N.m)		0.8
(N.m)		0.5
(N.m)		0.8
		8~9

-UL

(UL/CUL Group B)(V)		250
(UL/CUL Group B)(A)		10
UL/CUL	AWG	24
UL/CUL	AWG	14
UL/CUL	AWG	24

UL/CUL

AWG

14

&

(YES or NO)

YES

120

-40

