
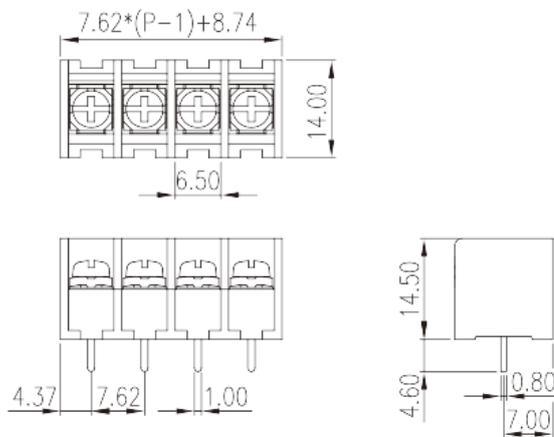


0032-14XX

>

:2026-05-14 :1.1

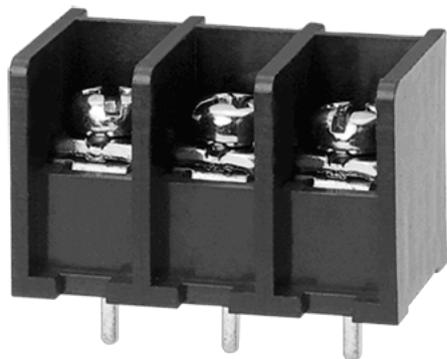

Pitch: 7.62mm, M3, 250V, 10A

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	7.62
	Black (default)
	Screw connection
	Without
	Wave Soldering
(mm)	$7.62 \times (P-1) + 8.74$
(mm)	14.00
(mm)	14.50
(x) (mm)	0.8x1.0
PCB (mm)	1.5~1.7
()	02P~13P
	Single Row
	PBT
	IIIa

UL 94	V0
	1000M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	630
(A)	17.5
(II/2)(V)	630
(III/2)(V)	630
(III/3)(V)	400
(II/2)(KV)	6
(III/2)(KV)	6
(III/3)(KV)	6
(mm ²)	0.2
(mm ²)	1.5
(mm ²)	0.2
(mm ²)	1.5
2 (mm ²)	1
2 (mm ²)	1
	M3
Width)(mm) (Blade thickness x	0.8x4.0
Philips	PH2
(N.m)	0.8
(N.m)	0.5
(N.m)	0.8
	8~9

-UL

(UL/CUL Group B)(V)	250
(UL/CUL Group B)(A)	10
UL/CUL AWG	24
UL/CUL AWG	14
UL/CUL AWG	24

UL/CUL	AWG	14
&		
(YES or NO)		YES
		120
		-40

