


# DT-3C-B01W-XX

>

:2026-07-05 :1.1

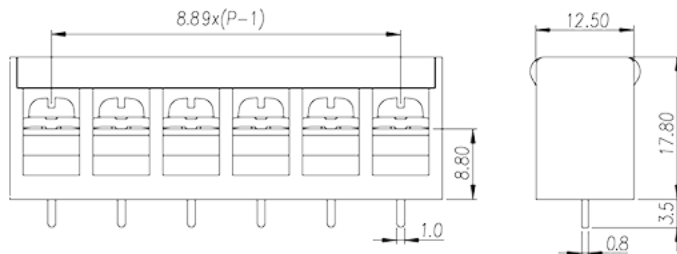

Pitch: 8.89mm , M3.5, 300V, 15A

	Barrier terminal blocks , Screw connection
	Single Row
(mm)	8.89
	Black (default)
	Screw connection
	Without
( x ) (mm)	0.8X1.0
PCB (mm)	1.4~1.5
	Single Row
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Tinned

-IEC

(A)		24
(II/2)(V)		630
(III/2)(V)		630
(III/3)(V)		400
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm <sup>2</sup> )		0.34
(mm <sup>2</sup> )		2.5
(mm <sup>2</sup> )		0.34
(mm <sup>2</sup> )		2.5
2	(mm <sup>2</sup> )	1.5
2	(mm <sup>2</sup> )	1.5
		M3.5
Width)(mm)	(Blade thickness x	0.8x4.0
Philips		PH2
(N.m)		1
(N.m)		0.8
(N.m)		1
		8~9

### -UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		15
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	22
UL/CUL	AWG	12
UL/CUL	AWG	22
UL/CUL	AWG	12

### &

(YES or NO)		YES
		130

