
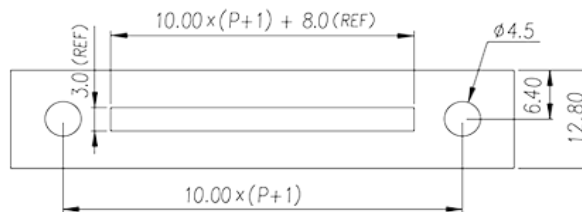


DT-5C-A02W-XX

>

:2026-07-05 :1.1

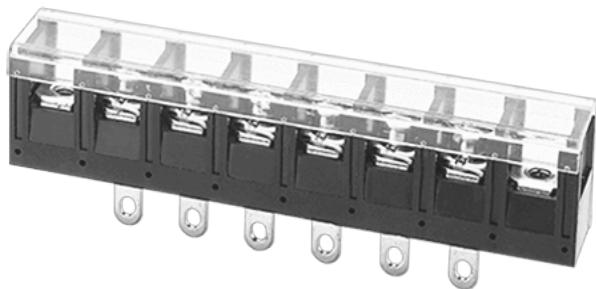

Pitch: 10.00mm, M4, 300V, 20A

	Barrier terminal blocks, Screw connection
	Single Row
(mm)	10.00
	Black (default)
	Screw connection
	With mounting flange
(mm)	$10.0 * (P + 1) + 13.00$
(mm)	15.00
(mm)	19.30
(x) (mm)	1.0x3.5
()	02P~28P
	Single Row
	PBT
	IIIa
UL 94	V0
	1000M at DC 500V



		COPPER ALLOY
		Tin PLATED
-IEC		
(V)		630
(A)		24
(II/2)(V)		630
(III/2)(V)		630
(III/3)(V)		320
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm ²)		0.2
(mm ²)		2.5
(mm ²)		0.2
(mm ²)		2.5
2	(mm ²)	1.5
2	(mm ²)	1.5
		M4
Width)(mm)	(Blade thickness x	1.0x5.5
Philips		PH2
(N.m)		1.1
(N.m)		0.8
(N.m)		1.1
		9~10
-UL		
(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		20
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		20
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	22



UL/CUL	AWG	14
UL/CUL	AWG	22
UL/CUL	AWG	14

&

(YES or NO)	YES
	130
	-40

UL

(Group B) (AWG)	22~14
(Group B) (V)	300
(Group B) (A)	20
(Group C) (AWG)	22~14
(Group C) (V)	300
(Group C) (A)	20
(Group D) (AWG)	22~14
(Group D) (V)	300
(Group D) (A)	10

CUL

(Group B) (AWG)	22~14
(Group B) (V)	300
(Group B) (A)	20
(Group C) (AWG)	22~14
(Group C) (V)	300
(Group C) (A)	20
(Group D) (AWG)	22~14
(Group D) (V)	300
(Group D) (A)	10

--	--

