
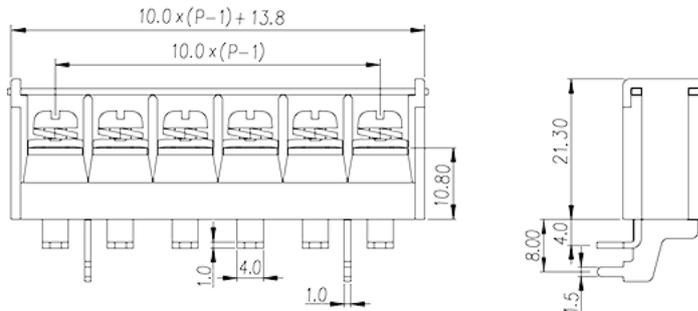


DT-51-B14W-XX

>

:2026-05-14 :1.1

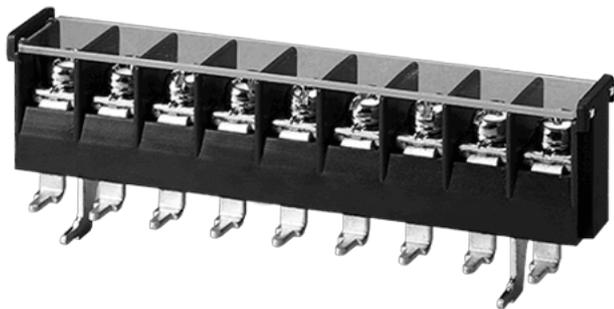

Pitch: 10.00mm , M4, 300V, 20A

	Barrier terminal blocks , Screw connection
	Single Row
(mm)	10.00
	Black(default)
	Screw connection
	Without
(x) (mm)	1.0X1.8
PCB (mm)	1.4x2.4
	Single Row
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Tinned

-IEC

(A)		24
(II/2)(V)		500
(III/2)(V)		500
(III/3)(V)		320
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm ²)		0.5
(mm ²)		2.5
(mm ²)		0.5
(mm ²)		2.5
2	(mm ²)	1.5
2	(mm ²)	1.5
		M4
Width)(mm)	(Blade thickness x	1.0x5.5
Philips		PH2
	(N.m)	1.8
	(N.m)	1.2
	(N.m)	1.8
		9~10

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		20
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	22
UL/CUL	AWG	12
UL/CUL	AWG	22
UL/CUL	AWG	12

&

(YES or NO)		YES
		130

-40

UL

(Group B) (AWG)	22~12
(Group B) (V)	300
(Group B) (A)	20
(Group C) (AWG)	22~12
(Group D) (AWG)	22~12
(Group D) (V)	300
(Group D) (A)	10

CUL

(Group B) (AWG)	22~12
(Group B) (V)	300
(Group B) (A)	20
(Group C) (AWG)	22~12
(Group D) (AWG)	22~12
(Group D) (V)	300
(Group D) (A)	10

VDE

(mm ²)	0.5~2.5
(A)	24

